

# SPECIFICATION SHEET

## PRODUCT # : CL-514C-RC

• Directional Lights

• Copper

### Fixture Specifications:

**Housing & Shroud:** Corrosion Resistant Copper.

**Finish:** RC- Raw Copper.  
Finish will age gradually over time.

**Lens:** Clear and heat resistant convex glass.

**Socket:** Top grade loose bi-pin socket, with spring loaded design.

**Lamp:** 12V, MR-16 halogen, 35W max. L-BAB-C20 (20w) standard. LED lamps available in 3.5W, and 5W-2700K color temperature. Available in 15°, 45°, 60° beam spreads for Cree and 45° for Epistar brands.

**Wiring:** Fixture is prewired with a 3-ft 18-2 SPT2-W direct burial cord. Wire connector available separately. Universal connector CX-839 or gel filled wire nut CX-854 may be ordered to Corona Lighting.


**Gasket:** Silicone gasket for water tight sealing.

**Knuckle:** Adjustable cast brass knuckle with thumb screw and ½" NPT threaded male hub on bottom.


**Mounting Spike:** Standard injection molded spike with ½" NPT threaded female hub.

**Electrical Notes:** A remote 12V transformer required, may be ordered to Corona Lighting separately. Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED Lamps are 9V-17V Proper grease/lubricant is suggested on threaded parts during installation process.

**Warranty:** Limited lifetime warranty on fixture housing against manufacturer's defects.

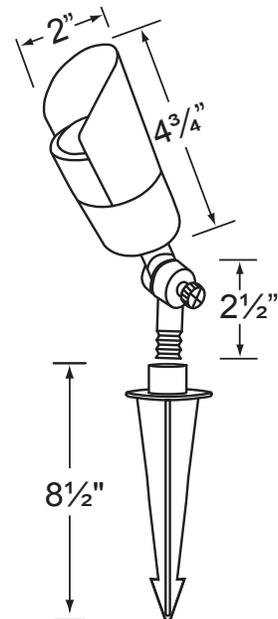

### MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



**Mounting Stems**

- CX-682C-RC 6"
- CX-683C-RC 12"
- CX-684C-RC 18"
- CX-685C-RC 24"
- RC - Raw Copper



**Mounting Canopy**

- CX-709B-BR
- BR- Natural Brass



**Mounting Pedestal**

- CX-603-BK
- BK - Black

### JOB INFORMATION

TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

JOB NAME & ADDRESS: \_\_\_\_\_

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixture without further notification.