

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021

FAX. (800) 727-9957

(800) 727-9262 (213) 747-3234 (213) 747-4500

E-Mail: sales@coronalighting.com

PRODUCT #: CL-752B-AB Path Lights

**Fixture Specifications:** 

Housing & Shroud: Corrosion Resistant Cast Brass. Wiring:

Stem: Solid brass pipe with 1/2" NPT on bottom .

Finish: AB- Antique Bronze. Natural toning process.

AB finish will vary due to artistic process.

Lens: Clear and heat resistant convex glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp

retension clip to securely hold lamp in place.

12V, MR-16 halogen, 50W max. L-BAB-C20 (20w) Lamp:

> standard.LED lamps available in 3.5W, 5W and 7W-2700K color temperature. Available in 15°, 45°, 60° beam spreads for Cree and 45° for Epistar brands.

Gasket: Silicone gasket for water tight sealing.

Knuckle: Adjustable cast brass knuckle with thumb screw

Cast Brass

Fixture is prewired with a 18-2 SPT2-W direct

burial cord. Wire connector available seperately. Universal connector CX-839 or gel filled wire nut

CX-854 may be ordered to Corona Lighting.

Mounting Spike: Standard injection molded spike with 1/2" NPT


threaded female hub.

Electrical Notes: A remote 12V transformer required, may be

ordered to Corona Lighting seperately. Voltage range for 12V halogen lamps are 11V-12.5V. Voltage range for LED Lamps are 9V-17V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and stem

against manufacturer's defects.

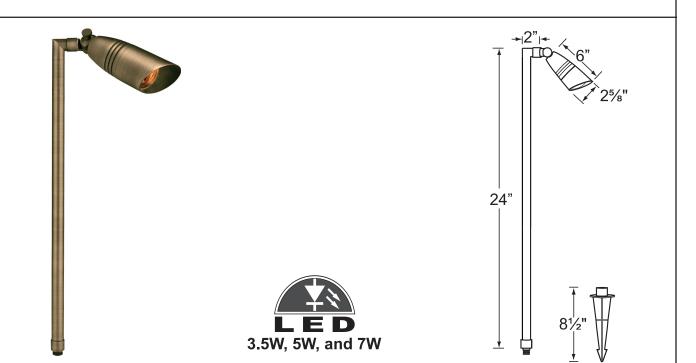

#### MOST COMMON ACCESSORIES USED WITH THIS FIXTURE



## **Mounting Stems**

CX-682B-AB 6" CX-683B-AB 12" CX-684B-AB 18" CX-685B-AB AB - Antique Bronze



# **Mounting Canopy** CX-709B-AB

AB- Antique Bronze



# **Mounting Pedestal**

CX-603-BK BK - Black

## JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

**TOTAL QUANTITY:** 

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: