

Ledge Light

FEATURES

- Stainless Steel
 - Mounting Plate
 - Screws
 - Glare Shield
- Break off corners on mounting plate for easy install (LL4407BZ only)
- 10' 18/2 landscape lighting wire
- Removable light bar for wider variety of uses
- Models
 - 1 LED (LL4403BZ)
 - 4 LEDs (LL4407BZ)
 - 8 LEDs (LL4413BZ) for even light distribution


COMMON SPECIFICATIONS

- Material: Cast Aluminum Light Bar
- Material: Stainless Steel Bracket & Glare Shield
- Finish: Architectural Bronze (AZ) Light Bar
- Finish: Bronze (BZ) Glare Shield
- Beam: 90°
 - x 1LED (LL4403BZ) @ 4 LED Watt Total
 - x 4LED's (LL4407BZ) @ 1 LED Watt Total
 - x 8 LEDs (LL4413BZ) @ 2 LED Watts Total
- Output: 60 Lpw
- Kelvin Color: 2750K
- Voltage Range: 8 - 18 VAC
- Electrical: 10' 18/2 Landscape lighting wire
- Models
 - 1 LED (LL4403BZ) 3" x 0.75" x 2.25"
 - 4 LEDs (LL4407BZ) 7" x 0.75" or 13" x 0.75"
 - 8 LEDs (LL4413BZ) 7" x 2.25" or 13" x 2.25"

APPLICATIONS

- Retaining Walls, Benches, Gazebos, Decks, Patios, Outdoor living spaces, Stairs

- All LEDs are rated at 35,000 hours with a 10 year warranty.
- Not for use with an Electronic Transformer
- All LEDs are rated at 2750 kelvin $\pm 10\%$.
- All LED's are measured at 12 volts AC when determining expected life. Increasing voltage above 12 volts AC may decrease life of LED.

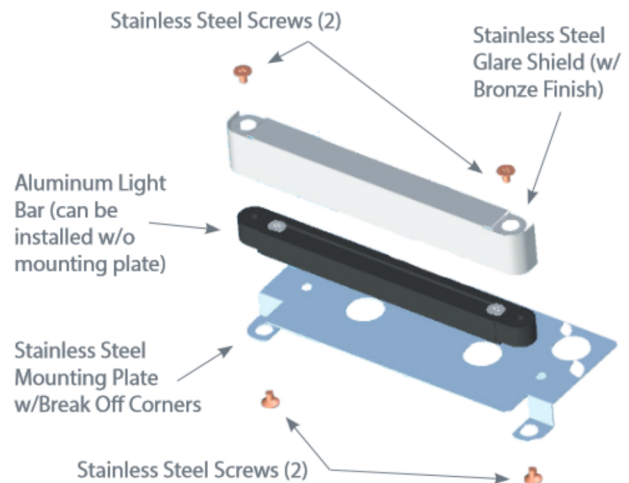

LL4403BZ



Images not to scale

