

# LF4MAX SERIES Outdoor Lighting

LF4MAX-XL-200-300W-MCTPB-KN-P  
LF4MAX-XL-200-300W-MCTPB-KN-P-BK  
LF4MAX-XL-200-300W-MCTPB-KN-P-WH

MAXIMUM-FEATURE ROUND-BACK FLOOD LIGHT WITH U BRACKET

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

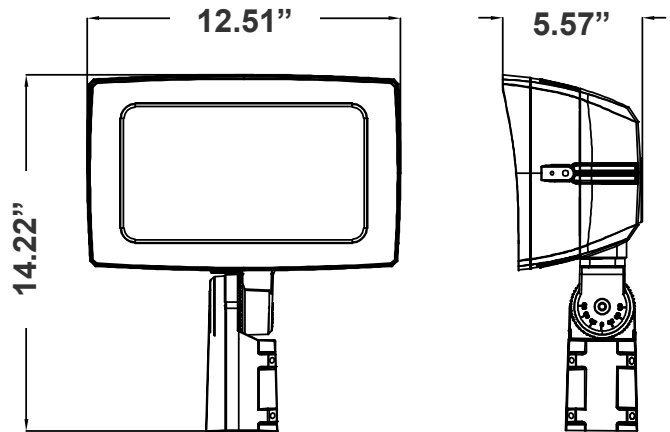

12.51"(W) x 14.22"(H) x 5.57"(D)

Round-back floodlight with U-bracket offering full control of beam angle, CCT, wattage, and photocell. Model MTP4 arriving this season.

## Features

- 90° Adjustable 1/2" Knuckle Mount
- 7-Year Warranty
- Multi-CCT & Multi-Power - The Switches are on the Bottom of the Fixture

## Technical Specifications

### Electrical:

- Voltage: 120~277VAC/50~60 Hz
- Wattage: 200W/240W/300W
- Power Factor: >0.9
- Efficacy: 140LPW

### Mechanical:

- Housing: Die-cast Aluminum Housing with Powder Coat Finish
- 90° Adjustable 1/2" Knuckle Mount
- Photocell Included (With Disconnect Switch)
- 6KV Lightning Surge Protection
- Cord Type: 6' SJTW 18/3 AWG Cable
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Effective projected areas (EPA's) are:
  - Front = 0.38 square feet
  - Side = 0.30 square feet
  - Face = 1.05 square feet
- IP Rating: IP65
- 7-Year Warranty

### Lighting:

- Dimming: 0~10V Dimmable
- Multi-CCT & Multi-Power - The Switches are on the Bottom of the Fixture
- Total Lumens: 42000LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index:  $\geq 70$
- Adjustable Beam Angle: 135°x125°/120°x120°/90°x90°
- 70,000 Hours Rated Life

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |




WG-01072025

## Photometrics: LEMAX-LG-75-150 W-MCTPB-P

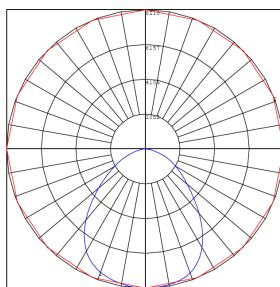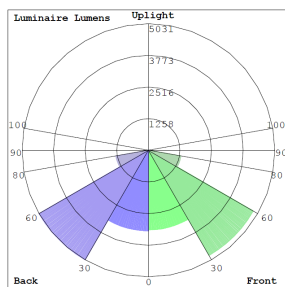

BUG Rating: B4-U0-G1

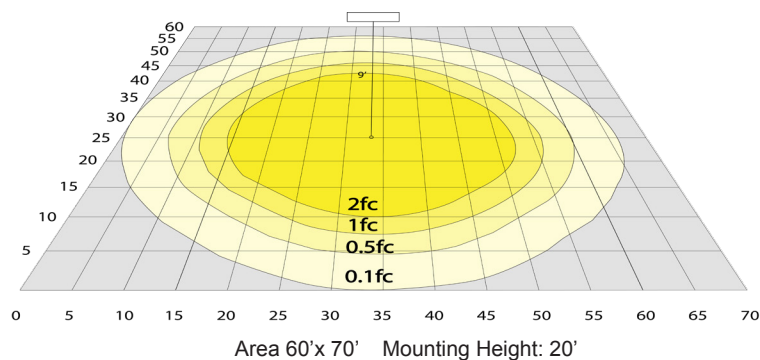

## Other Views:

Bronze:



Side View



Front View



Back View

Black:



Side View



Front View



Back View

White:



Side View



Front View



Back View

## Performance Table: LF4MAX-XL-200-300W-MCTPB-KN-P

| MODEL NO.                        | Wattage | Voltage  | Lumens  | Color Temp. | BUG Rating | LPW |
|----------------------------------|---------|----------|---------|-------------|------------|-----|
| LF4MAX-XL-200-300W-MCTPB-KN-P    | 200W    | 120~277V | 28000LM | 3000K       | B4-U0-G1   | 140 |
| LF4MAX-XL-200-300W-MCTPB-KN-P-BK | 240W    |          | 33600LM | 4000K       |            |     |
| LF4MAX-XL-200-300W-MCTPB-KN-P-WH | 300W    |          | 42000LM | 5000K       |            |     |

## Sample Ordering

| Model                                      | Size | Min.Wattage | Max.Wattage | Color | Temp.Basket | Photocell | Finishes |       |   |    |   |   |   |  |
|--|------|-------------|-------------|-------|-------------|-----------|----------|-------|---|----|---|---|---|--|
| LF4MAX                                     | -    | XL          | -           | 200   | -           | 300W      | -        | MCTPB | - | KN | - | P | - |  |
| Blank = Bronze<br>BK = Black<br>WH = White |      |             |             |       |             |           |          |       |   |    |   |   |   |  |

