

WAC LIGHTING

Charge 8020

16W H/J/L Track Luminaire

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| System Type & Voltage | Model | Color Temp & CRI | Lumens | CBCP | Finish |
|-------------------------------------|-------|------------------|--------|------|---|
| H 120 VAC J 120 VAC L 120 VAC | 8020 | 30 3000K - 90 | 1280 | 1402 | BK Black BN Brushed Nickel DB Dark Bronze WT White |

Example: **H-8020-30-BK**

DESCRIPTION

The Charge 8020 track luminaire offers superior light output in a small, unobtrusive design. Developed for residential spaces and lower-mounted commercial applications.

FEATURES


- 350° horizontal and 90° vertical aiming
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

| | |
|------------------------|--|
| Construction: | Die-cast aluminum with frosted TIR lens |
| Power: | 16W |
| Input: | 120 VAC, 50/60Hz |
| Dimming: | ELV: 100-5% , TRIAC: 100-5% |
| Light Source: | Integrated LED 3 Step Mac Adam Ellipse |
| Lens: | Frosted TIR Lens |
| Rated Life: | 50000 Hours |
| Finish: | Electrostatically Powder Coated:White, Electrostatically Powder Coated::Dark Bronze, Electrostatically Powder Coated:::Brushed Nickel, Electrostatically Powder Coated:::Black |
| Operating Temp: | -4°F to 104°F (-20°C to 40°C) |
| Standards: | ETL, cETL, Dry Location Listed, Energy Star 2.0, Title 24 JA8 Compliant |



FINISHES:

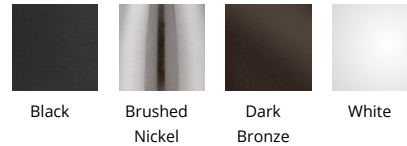

LINE DRAWING:

