

# EL560RICA

5" Line Voltage Remodel  
Housing for LED Inserts



## PROJECT INFORMATION:

Project Name: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Date: \_\_\_\_\_

## DIMENSIONS

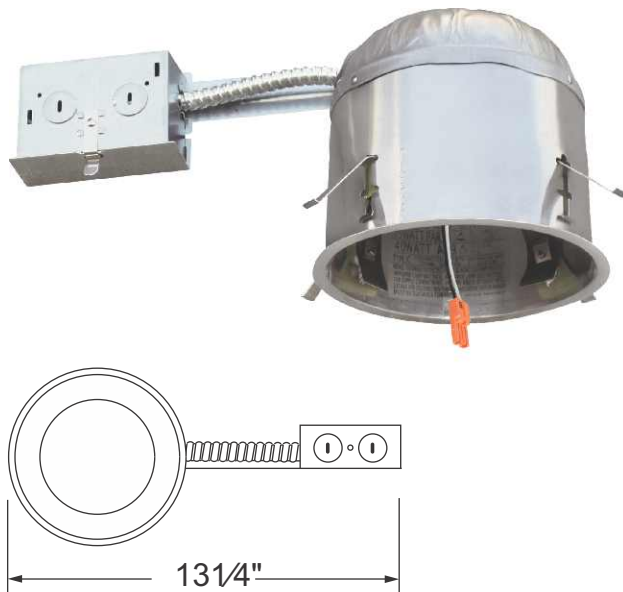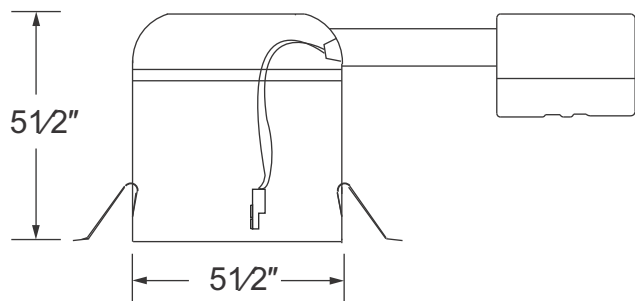

## PRODUCT SPECIFICATIONS

- Single wall IC construction, for use in insulated ceilings.
- Adjustable housing accommodates up to 1 1/4" ceiling thickness.
- Housing meets restricted air flow requirement (per ASTM E-283).

**Lamp:** 17W Max 120V

**Lamp Holder:** 2-wire quick connect terminal connector.

**Labels:** U.L. listed for damp locations  
U.L. listed for feed through  
U.L. listed for direct contact with insulation

- CA Title 24 compliant (as high efficacy luminaire).
- Trims sold separately.

## COMPATIBLE INSERT LIST

- Insert specification sheets available on [Elcolighting.com](http://Elcolighting.com)
- EL61030, EL61040, EL61130, EL61140, EL61530, EL55130, EL55230, EL59730
- ELSF1030, ELSF1040, ELSF1130

## INSTALLATION

**Junction Box:** Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

**Mounting:** (4) remodel clips secure housing and accommodate various ceiling thicknesses.

**Mounting Frame:** Stamped galvanized steel construction for corrosion resistance

## CATALOG NUMBER

**Example:** EL570RICA

See trims page for variety of trims available

