## **R2FSDL-WD**

# 2" FQ - Square Downlight Trimless (Dim-To-Warm)





P	RO	D	U	СТ	D	ES	CF	RIP	T	0	N
---	----	---	---	----	---	----	----	-----	---	---	---

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

#### **FEATURES**

- · Two-piece die-cast construction
- · Light engine mounted on trim with springs for easy replacement
- 30° shielding angle design for better visual comfort
- Field changeable beam angle with reflectors provided
- · Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### **SPECIFICATIONS**

**Construction:** Durable die-cast aluminum construction

Input Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic Low Voltage (ELV): 100%-1%

TRIAC: 100%-1% 0-10V: 100-1%

**Light Source:** High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

**Mounting:** Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø 3 1/2"

Accomodates 1/2 "- 1 " ceiling thickness

**Finish:** Electrostatically powder coated White, Black, Dark

Bronze. Enamel coated Haze.

Standards: ETL & cETL Wet Location Listed, Energy Star 2.0,

Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
434"	<b>R2FSDL</b> Square Trimless	F 40° W 55°	980 970	1620 1205	<b>WD</b> 3000K-1800K	90	BK DB HZ WT	Black Dark Bronze Haze White

#### R2FSDL-WD-


Example: R2FSDL-WD-WT (Beam F-40° reflector is pre-installed. Beam W-55° reflector is included.)

Please see next page for housing units (required)

## **R2FSDL-WD**



# 2" FQ - Square Downlight Trimless (Dim-To-Warm)

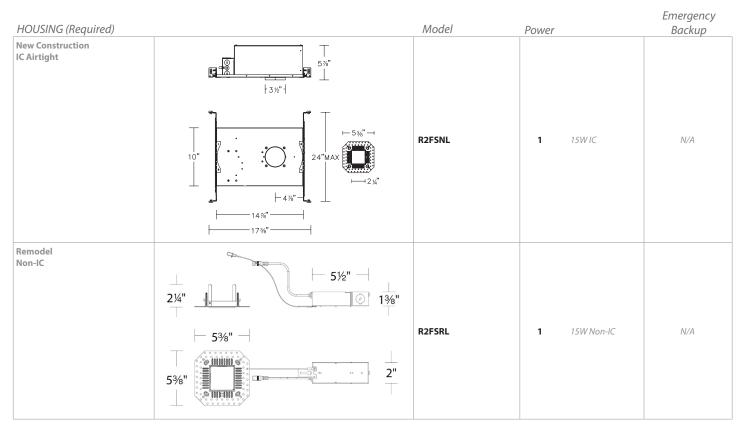

R2FS\_\_\_-

Example: R2FSNL-1

## **GLARE CONTROL ACCESSORIES**

LENS-11-HCM	Honeycomb Louver
LENS-11P-CRL-BK	Cross Louver

## **LENS ACCESSORIES**

LENS-11	AMB	Amber
	RED	Red
	BLU	Blue
	GRN	Green
	SPR	Spread
	BEL	Beam Elongating