## **R2FSWT-WD**

## 2" FQ - Square Wall Wash Trim (Dim-To-Warm)





	-	$\sim$	_		<b>CT</b>		FC	CD	יחו		N IN
r	п	u	v	u	ст	v	23	Ln	12	IIU	JΙΝ

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

#### **FEATURES**

- Two-piece die-cast construction
- Light engine mounted on trim with springs for easy replacement
- Designed for even wall illumination both vertically and horizontally
- 5 year WAC Lighting product warranty

Fixture Type:	
Catalog Number:	
·	
Project:	
Location:	

#### **SPECIFICATIONS**

**Construction:** Durable die-cast aluminum construction

Input Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic Low Voltage (ELV): 100%-1%

TRIAC: 100%-1% 0-10V: 100-1%

Light Source: High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

**Mounting:** Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø 3 1/2" Accomodates 1/2 "- 1 " ceiling thickness

**Finish:** Electrostatically powder coated White, Black, Dark

Bronze. Enamel coated Haze.

Standards: ETL & cETL Wet Location Listed,

Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
+ 2 ½" + + + + + + + + + + + + + + + + + +	<b>R2FSWT</b> Square Trim	A Asym	675	N/A	<b>WD</b> 3000K-1800K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White

### R2FSWT-WD-


Example: R2FSWT-WD-WT

Please see next page for housing units (required)

## **R2FSWT-WD**

# WAC

# 2" FQ - Square Wall Wash Trim (Dim-To-Warm)

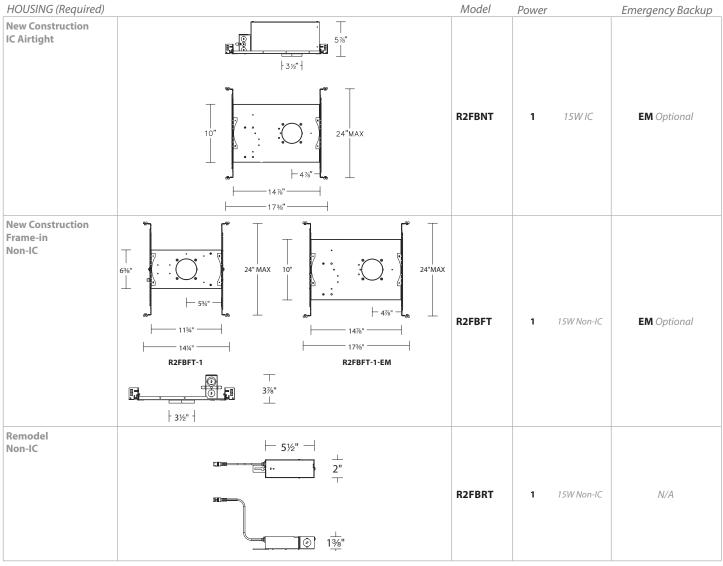

R2FB -

Example: R2FBNT-1 or R2FBNT-1-EM (with Emergency backup battery)