

# R4FBRT, R4FBR2T

## 4" FQ Remodel Housing

# WAC

### SPECIFICATIONS

**Input** Universal 120-277V AC 50/60 Hz

**Standards:** ETL & cETL

**Dimming:** Electronic Low Voltage (ELV): 100%-1%  
TRIAC: 100%-1%  
0-10V: 100-1%

**Mounting:** Ceiling thickness: 1/2"- 1"  
Ceiling cutout: Ø 4 3/4"

**Construction:** 20 Gauge galvanized sheet  
Die-cast spackle flange included

**Warranty** 5 year WAC Lighting product warranty


Fixture Type:

Catalog Number:

Project: \_\_\_\_\_

Location: \_\_\_\_\_

### Remodel Non-IC

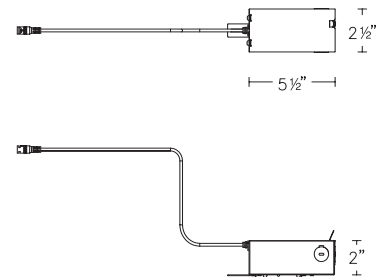


Model	Power	Rating
<b>R4FBRT</b>	<b>1</b> 13W	Non-IC
Round and Square Trim	<b>2</b> 19W	Non-IC
	<b>3</b> 25W	Non-IC
	<b>4</b> 28W	Non-IC

**R4FBRT-\_\_\_**

Example: **R4FBRT-2**

### Remodel IC

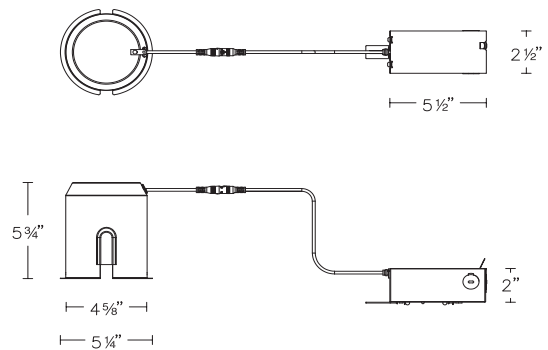

Model	Power	Rating
<b>R4FBR2T</b>	<b>1</b> 13W	IC
Round and Square DL Trim		

**R4FBR2T-\_\_\_**

Example: **R4FBR2T-1**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91761