


Features

- Excellent color rendering (94-96+ CRI)
- Color temperatures from 2700K to 4000K
- 100-155 lumens per foot performance
- Consumes only 2.19 watts per foot
- Dimmable with most ELV dimmers
- Cuttable every 6.56" (24V) and 3.94" (12V)
- 32.8 ft (24V DC) / 27 ft (12V DC) max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life
- Suitable for use in closets when used in an enclosed extrusion based on NFPA 70, NEC section 410.16 (A)(3) and 410.16 (C)(5)

Available CCT



2700K 3000K 4000K

Control Options

- Primary Side Dimming
- Single Color Controls
- Spektrum+™ Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ Standard Grade - 24V | 12V DC

Build an economical and versatile layered lighting system with Trulux™ Standard Grade tape light. Light output ranging from 100-155 lumens per foot, with easy to work with run lengths up to 32.8 feet (24V) | 27 ft (12V), Trulux™ Standard Grade is perfect for accent lighting applications when soft and subtle lighting is desired.

Technical Information

Series	STL
Input Voltage	24V DC 12V DC (STL-WW-100-12V only)
CCT	2700K 3000K 4000K
CRI	94+ (UWX & IP65) 96+
Wattage	2.19W per foot
Lumens	Up to 155Lm per foot
Max Run	32.8 ft (24V DC) 27 ft (12V DC)
Cuttable	Every 6.56in (24V DC) 3.94in (12V DC)
IP Rating	IP54 - Unjacketed IP65 - Jacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

*Not compatible with Switchex All-in-one LED Driver + In-Wall Dimmer Switch

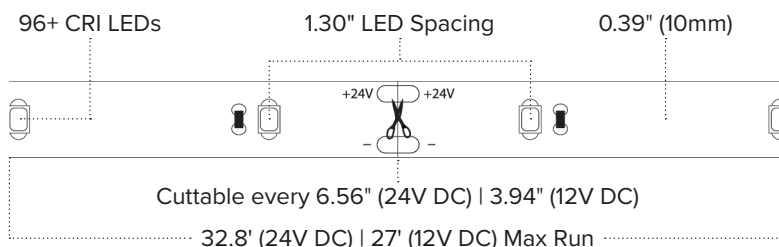



STL SERIES ORDERING INFORMATION

Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STL-UWW	24V DC	2700K	16.4ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-UWW-33	24V DC	2700K	32.8ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-UWW	24V DC	2700K	16.4ft	105Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-UWW-100	24V DC	2700K	100ft	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-UWW-CC	24V DC	2700K	Custom Cut	146Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WW	24V DC	3000K	16.4ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WW-33	24V DC	3000K	32.8ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-WW	24V DC	3000K	16.4ft	115Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-WW-100	24V DC	3000K	100ft	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WW-100-12V	12V DC	3000K	100ft	150Lm/ft	2.19W/ft	IP54	96+	3.94" (100mm)
STL-WW-CC	24V DC	3000K	Custom Cut	150Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WH	24V DC	4000K	16.4ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WH-33	24V DC	4000K	32.8ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL65-WH	24V DC	4000K	16.4ft	125Lm/ft	2.19W/ft	IP65	94+	6.56" (167mm)
STL-WH-100	24V DC	4000K	100ft	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)
STL-WH-CC	24V DC	4000K	Custom Cut	155Lm/ft	2.19W/ft	IP54	96+	6.56" (167mm)

STL (IP54) 16.4ft Reels include: Attached 3' lead wires | (3) TL-BLKS | (3) TL-CONKITS | (3) TL-2PWR-HD


STL (IP54) 32.8ft Reels include: Attached 3' Lead Wire | (3) HD Power Feeds

STL65 (IP65) 16.4ft Reels include: (1) Attached 2' IP65 lead + 6" CONKIT | (1) Attached 2' IP65 tail + 6" CONKIT | (3) HD power feeds | (3) HD tape-to-tape connectors


STL (IP54) 100ft Reels include: Attached 3' lead wires | (5) TL-BLKS | (5) TL-CONKITS | (5) TL-2PWR-HD

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector
TL-2JUMP65-.5	6" IP65 Linking Cable
TL-2JUMP65-1	12" IP65 Linking Cable
TL-2JUMP65-2	24" IP65 Linking Cable
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
LVS-2PIN	2pin Low-Voltage Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

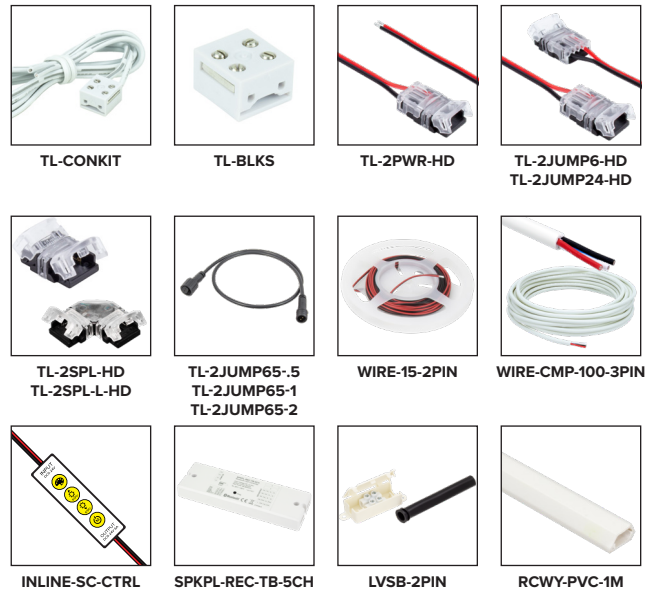

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light