

# WAC LIGHTING

## Endurance™ Brick Lights

### Opal Step And Wall Light

Model & Voltage	Color Temp & CRI	Lumens	Finish
WL-5105 120 VAC	3000K 90	110	ABK Architectural Black ABZ Architectural Bronze AGH Architectural Graphite AWT Architectural White

Example: **WL-5105-30-ABK**

#### DESCRIPTION

Designed for integration into brick walls or vertical risers. The energy-efficient Endurance™ LED Brick Light features a die-cast aluminum housing and integrated LED light engine with a heat resistant opal glass diffuser for a glare-free even spread of light, making outdoor areas safer and more secure.

#### FEATURES

- Frosted tempered glass lens for even illumination
- Factory sealed LED light engine
- 5 year warranty

#### SPECIFICATIONS

Construction	Die-cast aluminum (K-Alloy)
Power:	5.5W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Integrated LED
Rated Life:	80,000 Hours
Mounting:	Mortar into masonry, screw into wood walls, or retrofit into existing brick light installations. Can be mounted on wall vertically or horizontally
Cut Out:	3 1/4" x 8"
Finish:	Electrostatically Powder Coated: Architectural Black, Architectural Bronze, Architectural Graphite, Architectural White
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP66, ADA

#### REPLACEMENT PARTS


5005-30 - Replacement Light Engine 3000K  
5005-PLATE - Light Engine Mounting Plate  
5105-COV-ABK - Opal Cover Plate ABK  
5105-COV-ABZ - Opal Cover Plate ABZ  
5105-COV-AGH - Opal Cover Plate AGH  
5105-COV-AWT - Opal Cover Plate AWT

Fixture Type:

Catalog Number:

Project:

Location:

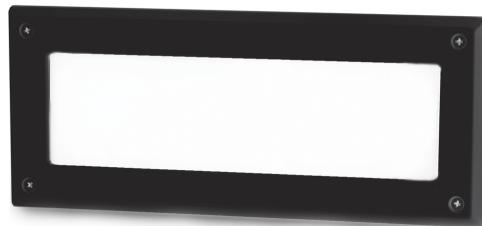

#### FINISHES:



Architectural Architectural Architectural Architectural  
Black Bronze Graphite White

#### LINE DRAWING

