


TIKKI LED AREA LIGHT

6041

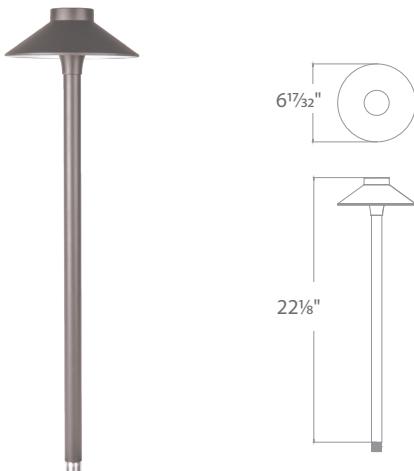

PRODUCT DESCRIPTION

Sturdy side mount design works well in applications where directional illumination is desired

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Solid diecast corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential: 7 to 9ft; Commercial: 5 to 7ft
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & CUL 1838 Listed

SPECIFICATIONS


Input: 9-15VAC (Transformer is required)
Power: 6.5W / 9.5VA (Use VA value for sizing the transformer and calculate voltage drop.)
Brightness: 225 lm
CRI: 90+
Rated Life: 60,000 hours

ORDERING NUMBER

Color Temp		Finish
6041	Tiki	27 2700K Warm White 30 3000K Pure White
		BBR Bronze on Brass BZ Bronze on Aluminum BK Black on Aluminum

6041-_____BK

Example: **6041-30BK**

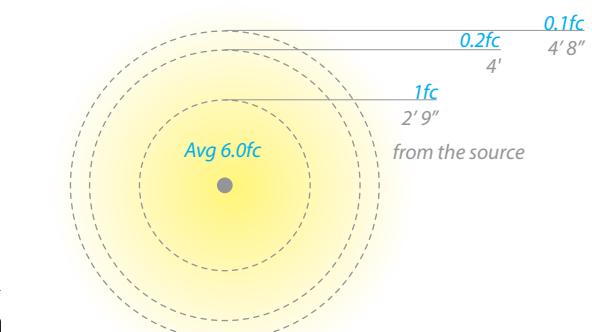

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761



Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box

5000-SCP-BZ
Bronze on Aluminum

Additional
Mounting Stake



9000-ST9-BZ
Durable PVC stake



Guardian Mount

*Heavy duty stainless steel spike to position fixture.
Formed from a single piece of metal*

9000-SP9-BZ
Stainless Steel

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories*

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max

