

# GPX SERIES Outdoor Lighting

GPX-18-60W-MCTP-GCP-BR  
GPX-18-60W-MCTP-GCP-SIL  
GPX-18-60W-MCTP-GCP-WH  
GARAGE/CANOPY LIGHTS

**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

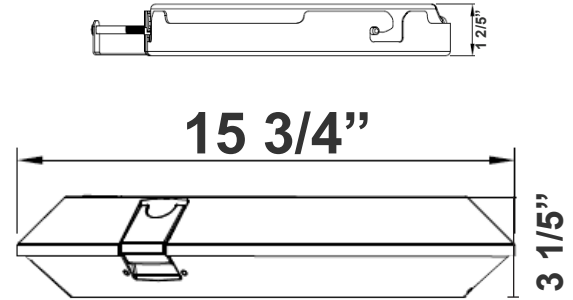

15 3/4" (W) X 4 3/5" (H)

## CEILING MOUNT BRACKET

Ideal for airports, auto dealerships, corporate offices, education, government, healthcare, industrial warehouses, municipal parking, gas stations, convenient stores, recreation and public venues, restaurants, hospitality, retail and grocery stores.

## Features

- Aluminum Housing ,Outdoor Powder Coated
- 7-Year Warranty
- Multi CCT and Power: Selectable Switch Inside Of The Fixture

## Technical Specifications

### Electrical:

- Voltage: 100-277V AC 50/60Hz
- Wattage: 18W/30W/45W/60W
- Power Factor: 0.95
- Efficacy: 150LM/W

### Mechanical:

- Aluminum Housing , Outdoor Powder Coated
- Ceiling Mount Bracket Fits on any 3" or 4" Junction Boxes with 1/2" KO on The Center
- Programmable Bi-Level Motion Sensor & Emergency Backup Options
- Operating Temperature: -86°F~122°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- Multi CCT and Power: Selectable Switch Inside Of The Fixture
- Dimmable: 0~10V Dimming
- LED: SMD 3030
- Total Lumens: 9000LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: Type V (150° X 150°)
- Lifespan: 70000 Hrs.

### Applications:


- Ideal For Garden, Amusement Park, Residential Quater , Industrial Park And Pedestrian street.




Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



**Photometrics:** GPX-18-60W-MCTP-CM

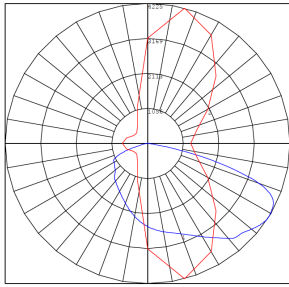

BUD Rating: B1-U1-G0

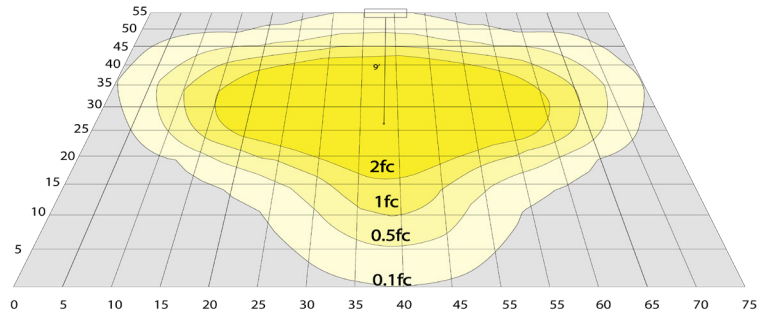


20W 5000K, Area55'x 75' Mounting Height: 9'

**Other Views:**

Bronze:



Mounting Bracket



Lens View




Top View

Silver:



Mounting Bracket



Lens View




Top View

White:



Mounting Bracket



Lens View



Top View

**Performance Table:** GPX-18-60W-MCTP-GCP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GPX-18-60W-MCTP-GCP-BR	18W	120-277V	2700LM	3000K 4000K 5000K	B1-U1-G0	150
GPX-18-60W-MCTP-GCP-SIL	30W		4500LM			
GPX-18-60W-MCTP-GCP-WH	45W		6750LM			
	60W		9000LM			

**Sample Ordering**

**Model**   **Min. Watt**   **Max. Watt**   **Color Temp.**   **Mount**   **Finish**  
 GPX - 18 - 60W - MCTP - GCP -

**Factory Installed Options:**

- Blank = No Option
- OPT-EM-OD2INT = INTERNAL EMERGENCY BACK UP BATTERY
- OPT-3MPC = MICROWAVE PHOTOCELL
- OPT-CLR-95(BK/GR/SR/WH) = COLOR PAINT
- OPT-SEN-3MR-3 = BI-LEVEL MICROWAVE SENSOR
- WEC-8RC = REMOTE CONTROL
- OPT-WP-480V = 480V OPTION
- OPT-GPX-LENS-TYPE2S = FACTORY- INSTALLED TYPE 2 LENS
- OPT-GPX-LENS-TYPE3S = FACTORY- INSTALLED TYPE 3 LENS
- OPT-GPX-LENS-FL = FACTORY- INSTALLED FROSTED GLASS LENS

- BR = Bronze
- SIL = Silver
- WH = White

**FACTORY INSTALLED OPTIONS:**




**COLOR CHART:** \* Choose from one of our Premium Colors with no set-up fee.

**Gloss:**



**Hammer:**

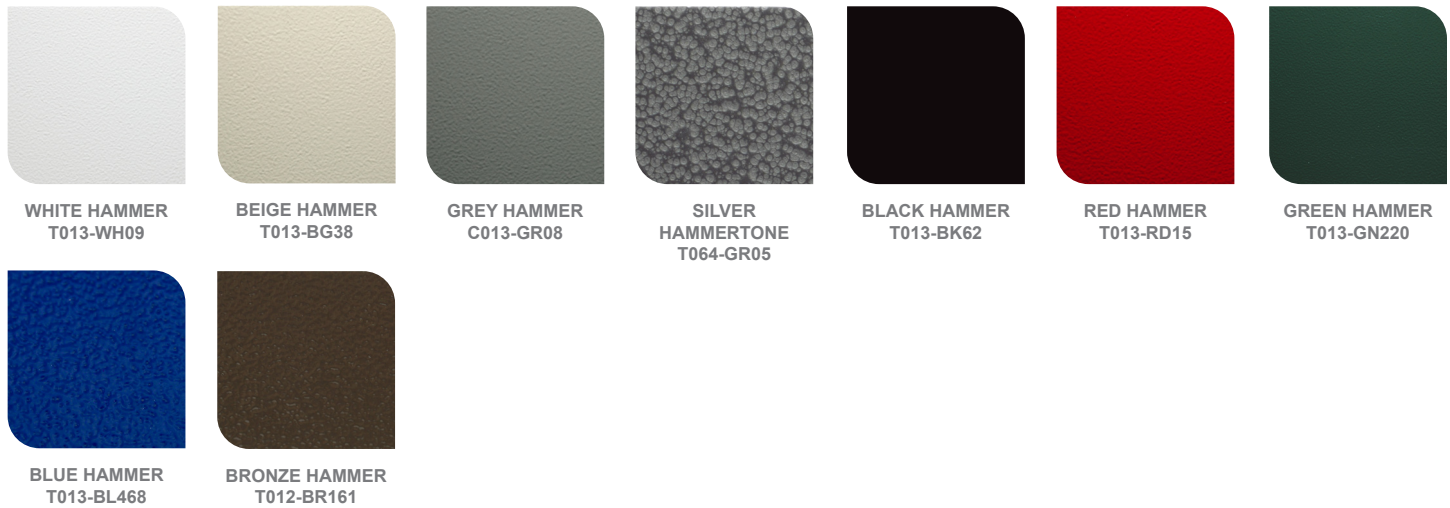

**Texture:**



**Vein:**

