

CGL SERIES


OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CGL-75W-50K-D
CGL-75W-40K-D



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

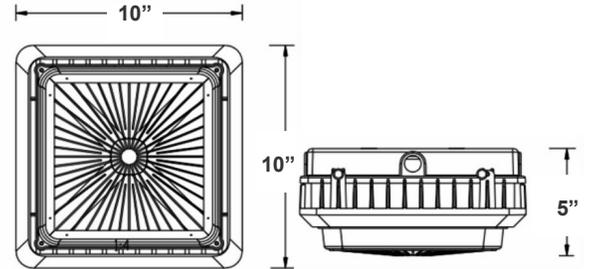

Ideal for indoor parking lots, commercial buildings, schools, warehouse, retail centers, apartment complexes.

10"(L) x 10"(W) x 5"(H)

Features

- Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- Factory- Installed Options: Battery Backup, Motion Sensor
- 7-year warranty

Technical Specifications

Electrical:

- Input Wattage: 75W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power factor: >0.90
- LPW: 129

Lighting:

- Dimming: 0~10V dimmable
- Total lumens: 9700LM
- Color temperature: 4000K/ 5000K
- Color rendering index: >80
- Beam angle: 150°
- Lifespan: 70000 Hrs

Mechanical:

- Die-cast Aluminum
- Four 1/2" threaded hubs located on four sides of the housing
- Prismatic polycarbonate lens
- Operating temperature: -40°F ~ 131°F
- IP rating: IP65, Wet Locations

Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:



- 40W | 5200LM | CGL-40W-40K-D
- 55W | 5200LM | CGL-55W-40K-D
- 100W | 13000LM | CGL-100W-40K-D
- 40W | 5200LM | CGL-40W-50K-D
- 55W | 5200LM | CGL-55W-50K-D
- 100W | 13000LM | CGL-100W-50K-D




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: CGL-75W-D



BUD Rating: B3-U3-G2

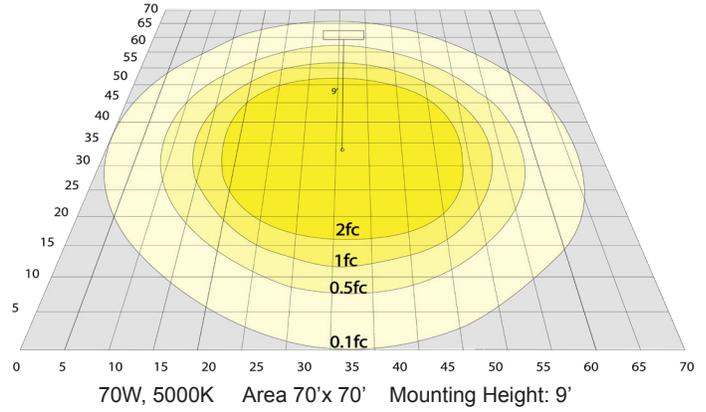

70W, 5000K Area 70'x 70' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: CGL-75W-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CGL-75W-40K-D	75W	120~277V	9700LM	4000K	B3-U3-G2	129
CGL-75W-50K-D	75W	120~277V	9700LM	5000K	B3-U3-G2	129

Sample Ordering

Model Wattage Color Temp. Dimming

CGL - 75W - - D
 50K = 5000K
 40K = 4000K

Accessories

Blank = No Option For Factory-Installead
 CGL-FL2 = FROSTED REPLACEMENT LENS
 WEC-3RC= REMOTE CONTROL FOR THE MOTION SENSOR

Factory Installed Options

Blank = No Option For Factory-Installead
 OPT-EM-OD2INT = INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-2MD-36 = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 OPT-CLR-95(BK/GR/SR/WH) = COLOR PAINTS
 OPT-PC-B = BUTTON PHOTOCELL
 OPT-TRS-T20 = TAMPER RESISTANT SCREW
 GPC-GBF-KIT = ONE-SIDE FROSTED GLASS LENS KIT
 GPC-GSF-KIT = 4-SIDE FROSTED GLASS LENS KIT
 GPC-PCLC = CLEAR PC LENS - NEEDS PRO INSTALLATION
 GPC-PCLF = FROSTED PC LENS - NEEDS PRO INSTALLATION

SENSOR AND REMOTE CONTROL OPTIONS



OPT-EM-OD2INT



WEC-3RC




OPT-PC-B



OPT-SEN-2MDR-36

MOUNTING OPTIONS

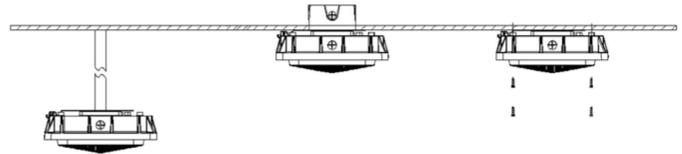

Example:

- CGL-75W-50K-D
- CGL-75W-50K-D
WEC-3RC

(CGL 75W 5000K fixture 120V-277V)

(CGL 75W 5000K fixture 120V-277V)
(Remote Control)



Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com

