

SL SERIES Outdoor Lighting

SL-30W-MCT-BR-CAM

SL-30W-MCT-WH-CAM

SL-30W-MCT-BK-CAM

3CCT SECURITY LIGHT WITH CAMERA - WG APP

MCT Multi Color Temperature (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

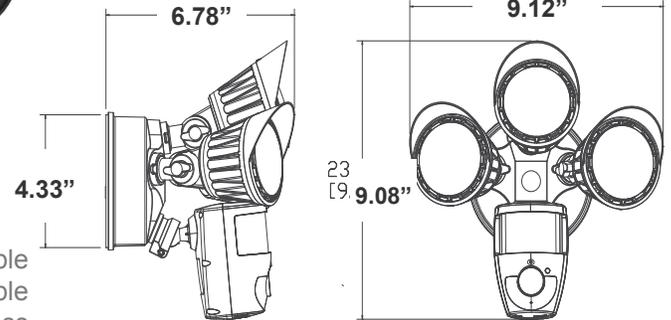

The SLX 3CCT Security Light with integrated camera is compatible with the WG app, enabling remote monitoring and customizable lighting control. It features adjustable switches for brightness (2-power), correlated color temperature (CCT), and dusk-to-dawn photocell sensitivity, allowing users to fine-tune light intensity, choose preferred color temperatures, and set activation based on ambient light levels. Built from high-quality, weather-resistant materials, the SLX Security Light delivers dependable performance in residential, commercial, and industrial environments, enhancing both security and visibility.

9.08"(H) x 9.12"(W) x 6.78"(D)

Features

- Durable Construction
- Easy Installation
- Adjustable CCT

Technical Specifications

Electrical:

- Voltage: 120V AC, 50/60Hz
- Wattage: 30W
- Power Factor: >0.9
- Efficacy: 93 LM/W
- WiFi Bandwidth: 2.5GHz
- WiFi Connection Range: up to 150 feet (46 m) indoors and 300 feet (92 m) outdoors

Lighting:

- MCT: Multi-CCT, The Switch Is On The Canopy
- Color temperature: 3000K/4000K/5000K
- Total Lumens: 2800LM
- Color Rendering index: >80
- Beam Angle: 100°
- Lifespan: 70000 Hrs.

Mechanical:

- Die-cast Aluminum, Powder Coated
- Operating Temperature: -40°F~104°F
- Suitable for Wet Location
- 7-Year Warranty

Applications:

- Residential Security: Enhance home safety
- Commercial Properties: Improve visibility
- Industrial Sites: Ensure secure operations
- Parking Areas: Increase safety
- Public Spaces: Boost nighttime illumination




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-20240528

Photometrics: SL-30W-MCT-CAM

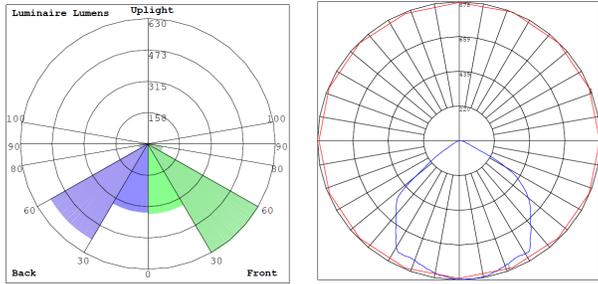

BUG Rating: B1-U1-G0

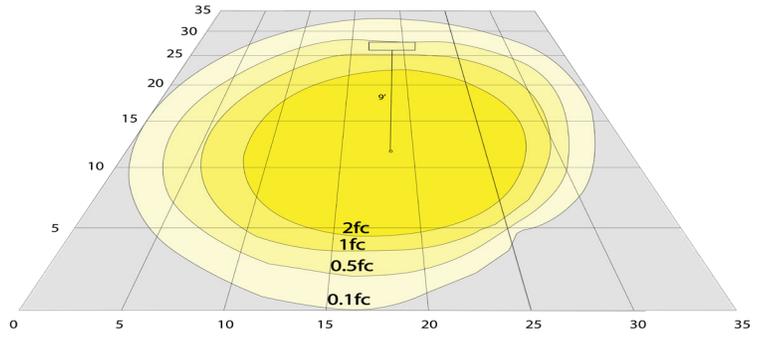

30W, 5000K Area 35'x 35' Mounting Height: 9'

Other Views:

SL-30W-MCT-BR-CAM



Side View



Top View



SL-CAM-BR

SL-30W-MCT-WH-CAM



Side View



Top View



SL-CAM-WH

SL-30W-MCT-BK-CAM



Side View



Top View



SL-CAM-BK

Performance Table: SL-30W-MCT-CAM

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SL-30W-MCT-BR-CAM	30W	120-277V	2800LM	3000K	B1-U1-G0	93
SL-30W-MCT-WH-CAM				4000K		
SL-30W-MCT-BK-CAM				5000K		

Sample Ordering

Model **Wattage** **Color Temp.** **Finish** **Camera**
 SL - 30W - MCT - - CAM
BR = Bronze
WH = White
BK = Black


Accessories Options

Blank = No Option for Accessories
 SL-CAM-WH = Security Camera Wg App Enabled White
 SL-CAM-BK = Security Camera Wg App Enabled Black
 SL-CAM-BR = Security Camera Wg App Enabled Bronze



Camera Specifications:

Feature	Specification
Detection Range	PIR sensing: 90–110° (7–10 m) Infrared sensing: 90–110° (7–10 m)
Camera Connectivity	Wi-Fi (Westgate Smart App)
Video Format	PAL / NTSC
Audio Output	Built-in loudspeaker
Audio Input	Built-in microphone
Lens	2.8 mm focal length
IP Rating	IP65
Focal Length	2.8 mm
Viewing Angle	90–110°
Resolution	1920 × 1080 (Full HD)

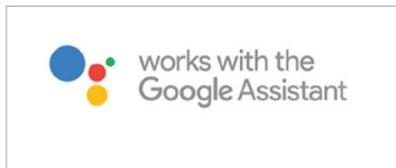

- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

