




DIMENSIONS:

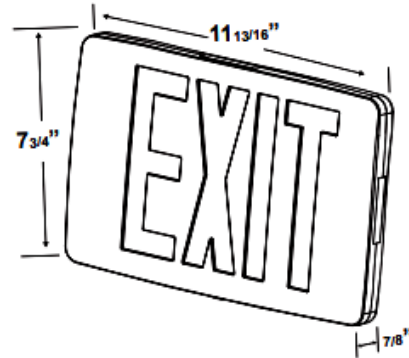

- | | |
|---------------------|---------------------|
| XD-TH-1GAAEM | XD-TH-2GAAEM |
| XD-TH-1GBBEM | XD-TH-2GBBEM |
| XD-TH-1GWWEM | XD-TH-2GWWEM |
| XD-TH-1RAAEM | XD-TH-2RAAEM |
| XD-TH-1RBBEM | XD-TH-2RBBEM |
| XD-TH-1RWWEM | XD-TH-2RWWEM |

RECESSED EDGELIT LED EXIT SIGN

ELECTRICAL SPECIFICATIONS:

- Voltage: Dual 120-277V

HOUSING SPECIFICATIONS:

- Aluminum mounting canopy included for top and back mount.
- Universal K/O on back plate for wall mount
- Trim plate housing: Aluminum & White, Black
- Single or double face
- Field selectable knockout chevron direction indicator.
- Low profile compact design
- Quick-snap face plate closure
- Suitable for damp location (32°F to 122°F)

CERTIFICATIONS: UL



MODEL	VOLTAGE	NUMBER OF FACEPLATE	BATTERY	LETTERS COLOR	TRIMPLATE
XD-TH-1GAAEM	120~277V	Single	Ni-Cad	Green	Aluminum
XD-TH-1GBBEM	120~277V	Single	Ni-Cad	Green	Black
XD-TH-1GWWEM	120~277V	Single	Ni-Cad	Green	White
XD-TH-1RAAEM	120~277V	Single	Ni-Cad	Red	Aluminum
XD-TH-1RBBEM	120~277V	Single	Ni-Cad	Red	Black
XD-TH-1RWWEM	120~277V	Single	Ni-Cad	Red	White
XD-TH-2GAAEM	120~277V	double	Ni-Cad	Green	Aluminum
XD-TH-2GBBEM	120~277V	double	Ni-Cad	Green	Black
XD-TH-2GWWEM	120~277V	double	Ni-Cad	Green	White
XD-TH-2RAAEM	120~277V	double	Ni-Cad	Red	Aluminum
XD-TH-2RBBEM	120~277V	double	Ni-Cad	Red	Black
XD-TH-2RWWEM	120~277V	double	Ni-Cad	Red	White

TECHNICAL SPECIFICATIONS:

- Solid state transfer switch automatically connects the internal battery to LED board
- Push-to-test switch for mandated code compliance testing
- Specification grade exit with Premium high-output ultra bright LEDs
- 2.4 V, Maintenance-free, Rechargeable Ni-Cad battery
- 90-minute with push style test switch and red indicator light

WARRANTY: 3 years

- Meets UL924, NFPA life safety code, Local and State codes, NEC, OSHA

