LTRAR SERIES Commercial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LTRAR-2X4-MCTP-SR

PASSIVE AIR RETURN CENTER LENS TROFFER WATTAGE & CCT SELECTABLE SENSOR-READY


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name:

Project Name:

Note: | Type:



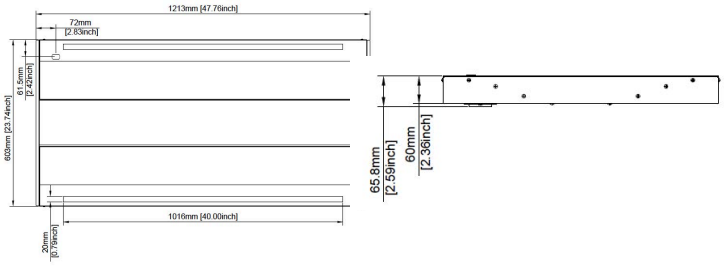

Passive Air Return Center Lens Troffer with field-selectable wattage and CCT, featuring a center lens design that supports passive HVAC air return. Sensor-ready for easy integration of occupancy or daylight controls, delivering efficient, uniform illumination for commercial spaces.

2.59"(D) x 47.76"(W) x 23.74"(H)

Features

- 5-Year Warranty
- White Finish
- Rated Life: 50,000 Hours
- Lens: Polycarbonate
- Multi CCT & Power (Selectable Switch On Back Of Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 35W/40W/45W/50W
- Power Factor: >0.97
- Efficacy:135 LPW

Mechanical:

- White Finish
- Cold-Rolled Steel
- Designed for standard T-grid ceilings (lay-in)
- Passive air return vents on both sides support return airflow through ceiling plenum. Fixture does not include duct collar.
- 4-Pin BH4S Receptacle Pre-Installed on the Side of the Panel, See Motion Sensor Accessories
- Earthquake Hooks Built Into The Housing
- Operating Temperature: -4°F ~ 122°F
- 5-Year Warranty

Lighting:

- Multi CCT & Power (Selectable Switch On Back Of Fixture)
- Dimmable: 0~10V Dimming
- LED Type: SMD 2835
- Total Lumens: 6750LM
- Color Rendering Index: CRI ≥ 80
- Color Temperatures: 3000K/3500K/4000K/5000K
- Rated Life: 50,000 Hours


Applications:

- Ideal for offices, classrooms, healthcare facilities, corridors, and other commercial or institutional spaces requiring efficient lighting with integrated passive air return and lighting controls compatibility.


UL LISTED DIMMING 1-10V 5 YEAR LIMITED WARRANTY

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |

Photometrics: LTRAR-2X4-MCTP-SR

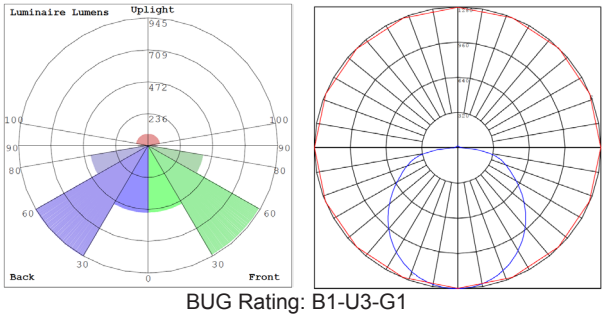

BUG Rating: B1-U3-G1

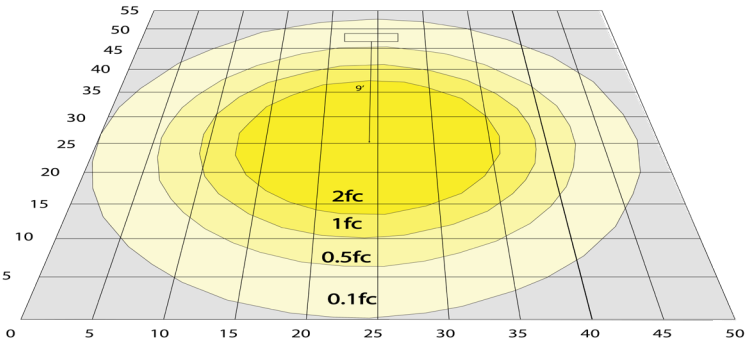

Area 55'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LTRAR-2X4-MCTP-SR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRAR-2X4-MCTP-SR	35W 40W 45W 50W	120~277V	4725LM 5400LM 6075LM 6750LM	3000K 3500K 4000K 5000K	B1-U3-G1	135

Sample Ordering

Model	Size	Color Temp.	Sensor Ready
LTRAR	2X4	MCTP	SR

Accessories:

Blank = No Option For Accessories
KEA-IFS108-BH4 = AUTANI SMART PIR 4-Pin BH4S TROFFER AND PANEL SENSOR 12VDC 18FT


Blank = No Option For Accessories
OPT-EM-LTRAR = EMERGENCY BACKUP BATTERY MOUNTED ON TOP OF FIXTURE

ACCESSORIES:



KEA-IFS108-BH4

FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRAR