
LCL SERIES Commercial Lighting

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LCL-4FT-40W-MCTP-EM-SEN
POWER & CCT ADJUSTABLE LINEAR CORNER CORRIDOR
WITH BI-LVL SENSOR & EMERGENCY BACKUP


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

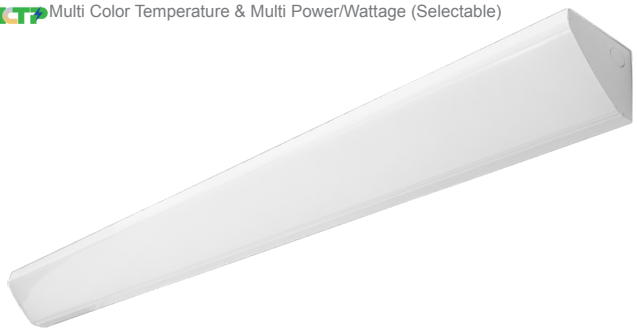

Customer Name:

Project Name:

Note: | Type:

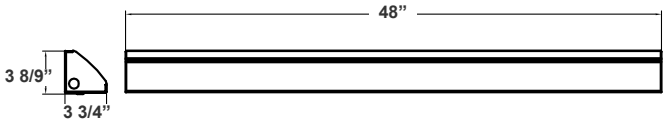

48”(w) x 3 8/9”(H) x 3 3/4”(D)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

Features

- LED Strip Lights
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens
- MCTP: Multi Color Temperature and Power (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W/30W/40W
- Power Factor: >0.98
- Efficacy: 115 LPW

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Mounting: Surface Mount, Wall Mount
- Operating Temperature: -22ºF -104ºF
- Suitable for Damp Location

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2300LM/ 3450LM/ 4600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80

Emergency Battery Backup Spec:

- Output Power: 4W
- Output Voltage: 50V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The

Sensor Spec:

- Detection Range: 17Ft. / 360°
- Mounting Height: 25Ft. Max.
- DIP Settings switch on The Sensor
- Optional Remote Control (WEC-3RC)


Applications:

- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications


c UL us LISTED DIMMING 1-10V 5 YEAR LIMITED WARRANTY

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

Photometrics: LCL-4FT-40W-MCTP-EM-SEN

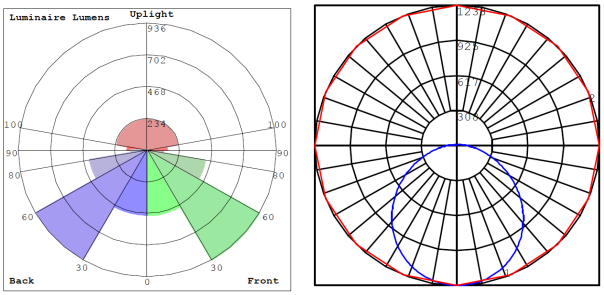

BUD Rating: B1-U3-G2

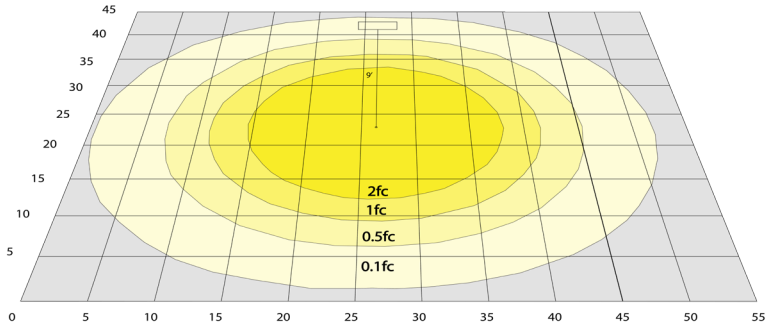

Area 45'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LCL-4FT-40W-MCTP-EM-SEN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCL-4FT-40W-MCTP-EM-SEN	20W 30W 40W	120~277V	2300LM 3450LM 4600LM	3500K 4000K 5000K	B1-U3-G2	115

Sample Ordering

Model		Size		Wattage		Color Temp.	Battery		Sensor
LCL	-	4FT	-	40W	-	MCTP	EM	-	SEN

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-LCL= INTERNAL EMERGENCY BACKUP BATTERY
OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
OPT-2P-58 = OPTIONAL REMOTE CONTROL
WEC-3RC = (REMOTE NOT NEEDED)
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-LCL



OPT-SEN-2US



OPT-SEN-LLHB-OC1