LCL SERIES Commercial Lighting


LCL-4FT-40W-MCTP
LINEAR CORNER CORRIDOR FIXTURE

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:
Project Name:
Note: | Type:



MCTP Selection:

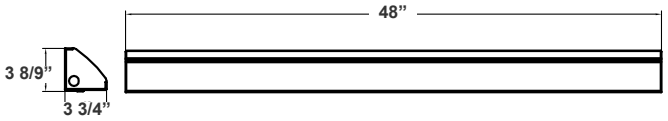

48”(w) x 3 8/9”(H) x 3 3/4”(D)

LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc. Engineered with stable performance LED engines and the world's top brand LED driver. Same footprint as traditional 2-lamp strip lights

Features

- LED corner/corridor strip lights
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens
- MCTP: Multi Color Temperature and Power (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W/30W/40W
- Power Factor: >0.98
- Efficacy: 115 LPW

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2300LM/ 3450LM/ 4600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80

Mechanical:

- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps into the tabs of the Housing Fixture
- Mounting: Surface Mount, Wall Mount
- Operating Temperature: -22ºF -104ºF
- Suitable for Damp Location

Applications:

- Ideal for architectural lighting solutions, a variety of industrial, commercial and residential applications

Other Models:


- 20W | 2270LM | LCL-3FT-30W-MCTP

UL LISTED | DIMMING | IP44 | 5 YEAR LIMITED WARRANTY


Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

WG-Z5-2C-2Z

Photometrics: LCL-4FT-MCTP

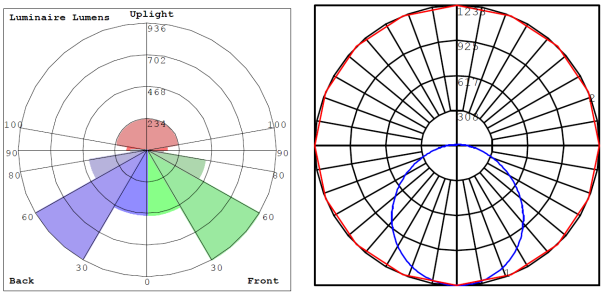

BUD Rating: B1-U3-G2

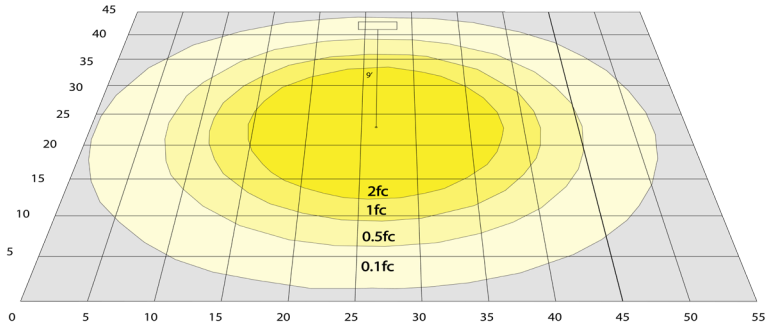

Area 45'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LCL-4FT-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LCL-4FT-40W-MCTP	20W 30W 40W	120~277V	2300LM 3450LM 4600LM	3500K 4000K 5000K	B1-U3-G2	115

Sample Ordering

Model	Size	Wattage	Color Temp.
LCL	4FT	40W	MCTP

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY
OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING
OPT-SEN-2USRC = OPTIONAL RC
OPT-SEN-LLHB-OC1 = LLHB-OC1 EXTERNAL STANDARD PIR OPT-SENSOR
OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE
OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE
OPT-SEN-DAYLIGHT = DAYLIGHT HARVESTING SENSOR WORKS WITH ABOVE OPT-SEN-2US

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH



OPT-EM-CM1INT



OPT-SEN-2US



OPT-SEN-LLHB-OC1



OPT-SEN-2USRC



OPT-SEN-DAYLIGHT

Example:

1. **LCL-4FT-40W-MCTP** (FOR LCL 40W MCTP FIXTURE 120-277V)

2. **LCL-4FT-40W-MCTP** (FOR LCL 40W MCTP FIXTURE 120-277V)
   OPT-SEN-2US (ULTRASONIC BI-LEVEL DIMMING REMOTE NOT NEEDED)