

SFX SERIES OUTDOOR LIGHTING

SFX-G9-800W-45D-RGB
LED STADIUM FLOOD LIGHTS

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

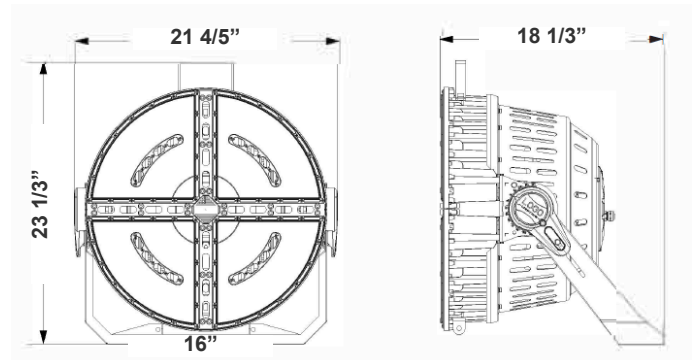

23 1/3"(H) x 21 4/5"(W) x 18 1/3"(D)

Ideal for Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions

Features

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- LED: Lumileds Luxeon SMD 3535
- 7-year Warranty
- Lens: Prismatic Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 800W
- Power Factor: >0.90~0.97
- Efficacy: 150LPW

Mechanical:

- Die-Cast Aluminum Housing with Powder Coat Finish (Black)
- In A DMX Lighting Setup, Lights Need To Be Connected With cables. The Cables Can Be "Daisy Chained" So That Each Light Can Plug Into The One Before It Instead Of All Lights Plugging Into The DMX Board Itself
- Cord type: 3' SJTW 18/3 AWG Cable
- Effective Projected Area (EPA): 1.8 (sq. ft.)
- Operating Temperature: -40°F to 122°F
- IP Rating: IP66, Suitable for Wet Locations
- 7-year Warranty

Lighting:

- Lens: Prismatic Polycarbonate Lens
- LED: Lumileds Luxeon SMD 3535
- Total lumens: 120000LM
- Color Temperatures: RGB
- Color Rendering Index: CRI ≥ 70
- Rated Life: 70,000 Hrs
- Beam Angle: 45°

Applications:

- Stadium lighting, Sports fields, parking lots, docks, railway and container yards, Architectural lighting, Industrial and commercial exterior lighting, trade shows, exhibitions.

Other Model:

- 500W | 75000LM | SFX-G9-500W-45D-RGB




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-ZA-27-22

Photometrics: SFX-G9-800W-45D-RGB



BUG Rating: B5-U0-G2

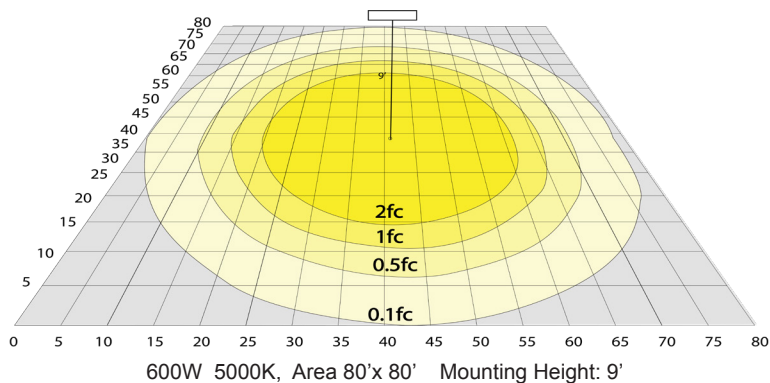

600W 5000K, Area 80'x 80' Mounting Height: 9'

Other Views:



Shown with optional shroud



Front View



Back View

Performance Table: SFX-G9-800W-45D-RGB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFX-G9-800W-45D-RGB	800W	120~277V	120000LM	RGB	B5-U0-G2	150

Sample Ordering

Model		Style		Watt		Size		Color Temp.
SFX	-	G9	-	800W	-	45D	-	RGB

Accessories:

Blank = No Option For Accessories

SFX-G9-SH1= SHROUD FOR G9 600W STADIUM LIG

SFX-G9-SF= SLIP FITTER, COMES WITH ITS OWN REPLACEMENT "U" BRACKET

ACCESSORIES:



SFX-G9-SH1



SFX-G9-SF

Example:

1. SFX-G9-800W-45D-RGB

(FOR SFX 800W RGB FIXTURE 120-277V)

2. SFX-G9-800W-45D-RGB
SFX-G9-SH1

(FOR SFX 800W RGB FIXTURE 120-277V)
(SHROUD FOR 600W)

