

XT-EL SERIES Exit & Emergency Lighting

XT-EL1GCA-EM
EDGE LIT LED EXIT SIGN WITH ALUMINUM HOUSING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Exit signs shall be provided at every exit door, at the intersection of corridors, at exit stairways or ramps, and at other locations and intervals necessary to give the occupants knowledge of the various means of egress available.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

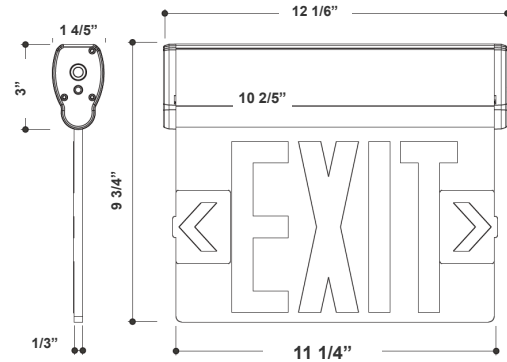

9 3/4" (H) x 12 1/6" (W) x 1 4/5" (D)

Features

- Innovative, easy installation in minutes
- Built-in 34.8V 400mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- 3-Year Warranty
- Universal ceiling & wall mounting plate allows top, back or end installation
- Universal J-box mounting pattern

Technical Specifications

Electrical:

- Voltage: 120V-277V AC Dual voltage operation
- Power Factor: >0.90
- Wattage: 2.5W

Mechanical:

- Aluminum housing with Clear Panel (mirror) panel
- Universal ceiling & wall mounting plate allows top, back or end installation
- Universal J-box mounting pattern
- Test switch and charge indicators
- Removable directional indicators (Chevrons)
- Optional recessed mounting kit, see accessories.
- Single Face. Optional double face plate available, see accessories
- Maximum 24 hours for full recharge time
- Operating temperature: 32°F to 104°F
- Rated life: 90-minute rated battery
- 3-Year Warranty

Lighting:

- Green letters: 6" height with 3/4" stroke
- Built-in 34.8V 400mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Total Lumens: 13LM
- Color Temperatures: 1001K

Applications:

- Ideal for every exit door, at the intersection of corridors, exit stairways or ramps, and such other locations.

Other Models:

- 2.5W | 13LM | XT-EL1RCA-EM



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



WG-04252022

Other Views:



Side View



Front View



Back View

Performance Table: XT-EL1GCA-EM

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating
XT-EL1GCA-EM	2.5W	120-277V	13LM	1001K	B0-U1-G0

Sample Ordering

Model Face No. Color Faceplate Battery

XT-EL 1 G CA - EM

Accessories:

Blank = No Option
 XT-EL2GM-CP = Field-Installed Double-Face Mirror Panel only to Convert Single Face to Double Face- Green
 XT-ELRMA = Field-Installed Recessed Mounting Conversion Kit, Order together with Exit Sign above

ACCESSORIES:



XT-EL2GM-CP



XT-ELRMA
 Shown Installed. Exit Sign Not Included

Example:

- 1. XT-EL1GCA-EM (FOR XT-EL 1X4 FIXTURE 120-277V)
- 2. XT-EL1GCA-EM (FOR XT-EL 1X4 FIXTURE 120-277V)
 XT-ELRMA (FIELD-INSTALLED RECESSED MOUNTING CONVERSION KIT)

Other Model: XT-EL1RCA-EM



Side View



Front View



Back View

