

LFX-SM SERIES Outdoor Lighting

LFX-SM-10-30W-MCTP-KN-BK-P

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

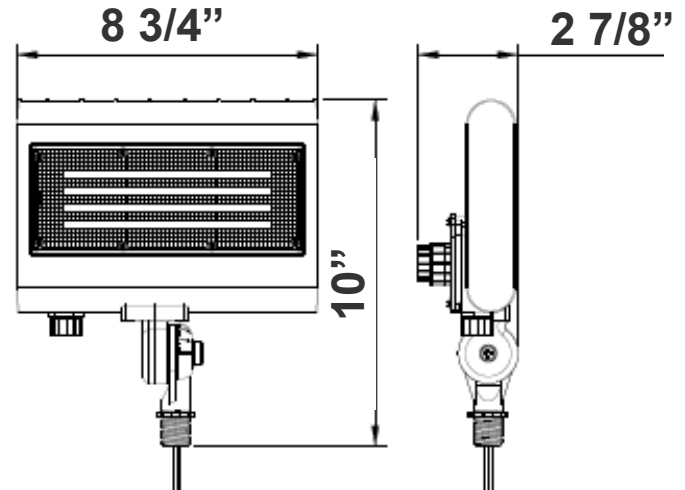

10"(H) x 8 3/4"(W) x 2 7/8"(D)

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- Pre-Installed DC Button Photocell
- Optic Lens Type: III
- Multi-CCT Power - The Switch is on the Bottom of the Fixture

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 10W/20W/30W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Pre-Installed DC Button Photocell
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 122°F
- Suitable for Wet Locations
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Multi-CCT Power - The Switch is on the Bottom of the Fixture
- Total Lumens: 3900LM Max.
- Color Temperature: 3000K/4000K/5000K/5700K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com |




WG-ZB-Y6-2Z

Photometrics: LFX-SM-10-30W-MCTP-KN-BK-P



BUG Rating: B2-U0-G1

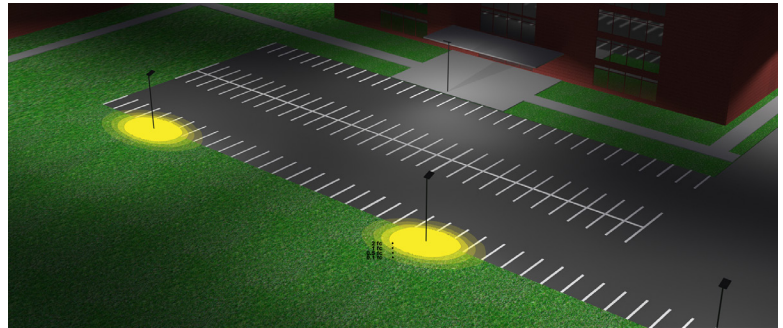

Area 40'x 50' Mounting Height: 20'

Other Views:



Side View



Front View



Back View

Performance Table: LFX-SM-10-30W-MCTP-KN-BK-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-SM-10-30W-MCTP-KN-BK-P	10W 20W 30W	120~277V	1300LM 2600LM 3900LM	3000K 4000K 5000K 5700K	B2-U0-G1	130

Sample Ordering

Model	Size	Min.Wattage	Max.Wattage	Color Temp.	Mount	Finish	Photocell
LFX	SM	10	30W	MCTP	KN	BK	P

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs

LF3-SH2 = Shroud for LF3 50W Reversible

LF3-SH2FG = Full-Glare Shroud for LF3 SM

Color Options: Custom Color Available

Black Silver White Dark Bronze Green Red Yellow
Default color



ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs



B-41



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility



LF3-SH2
Shroud (Reversible)



LF3-SH2FG
Full-Glare Shroud

