

VLM SERIES MCTP

COMMERCIAL OUTDOOR LIGHTING


WMDL-15-25W-MCTP5-D-P-WH
WMDL-15-25W-MCTP5-D-P-BK
WMDL-15-25W-MCTP5-D-P
14" Dual-Lens Vandal-Proof Wall Light with Photocell, 120-277VAC



White

Black

Brown

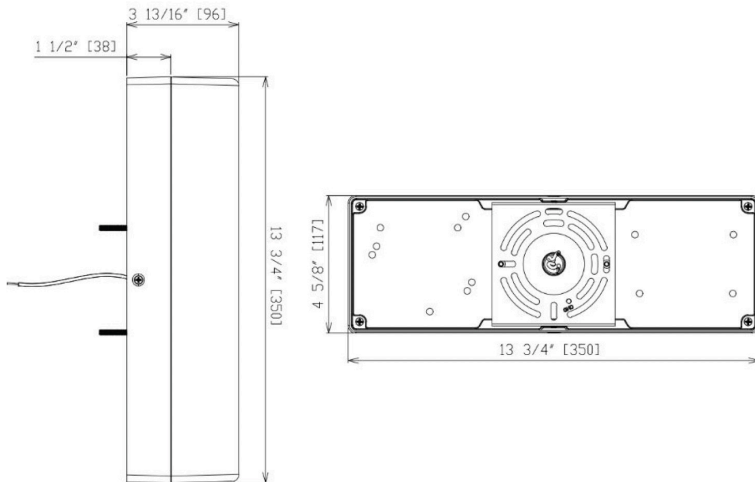

The WMDL Series is a 14" dual-lens vandal-proof LED wall light designed for outdoor commercial and architectural applications. The fixture combines selectable wattage, 5CCT color selection, 0-10V dimming, and an integrated photocell for flexible, energy-efficient operation. Its aluminum die-cast housing, wet location rating, IP65 protection, and IK08 impact rating make it suitable for demanding exterior wall-mount installations. The dual-layer lens delivers soft, even illumination while providing a premium glass-like appearance and added durability.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

FEATURES:

- UL Listed, based on provided Westgate catalog artwork
- Wet location rated for outdoor wall-mount applications
- Integrated photocell for dusk-to-dawn operation
- Field-selectable wattage and CCT for jobsite flexibility
- Vandal-proof dual-lens construction improves durability
- High-end glass-look lens design
- 0-10V dimming standard
- Available in White, Black, and Bronze finishes
- Factory-installed emergency backup option available
- Sensor and remote control options available

SPECIFICATIONS:

ELECTRICAL:

- Voltage: 120-277VAC
- Wattage selectable: 15W / 20W / 25W
- 0-10V dimming
- Power factor: 0.9
- THD: >20%
- Operating temperature: -4°F to 113°F
- Integrated photocell sensor
- Emergency backup capable with factory-installed option

MECHANICAL:

- Housing: Aluminum die-cast construction
- Optic: PC lens
- Finish options: White, Black, Bronze
- Dimensions: 13-3/4" H x 4-5/8" W x 3-13/16" D
- Wet location rated
- IP65 rated
- IK08 impact rating
- Package quantity: 6
- 7-Year warranty

LIGHTING:

- Lumens: 1,350-2,750LM
- Efficacy: 90-110 LM/W
- 5CCT selectable: 2700K / 3000K / 3500K / 4000K / 5000K
- CRI: 80
- Beam angle: 130°
- Dual-layer lens design for soft, even illumination
- Clear outer lens provides a glass-like appearance with added impact resistance
- 70000 Lifespan



APPLICATIONS:

- Ideal for exterior building perimeters, walkways, stairwells, parking areas, schools, multifamily properties, and commercial facilities requiring durable vandal-resistant illumination with automatic dusk-to-dawn operation.

PERFORMANCE TABLE

MODEL NO.	WATTAGE	LUMEN	COLOR TEMP.	LPW
WMDL-15-25W-MCTP5-D-P-WH WMDL-15-25W-MCTP5-D-P-BK WMDL-15-25W-MCTP5-D-P	15W/20W/25W	15W/20W/25W	2700K 3000K 3500K 4000K 5000K	110LM/W

FACTORY-INSTALLED OPTIONS

MODEL NO.	DESCRIPTION	IMAGE
OPT-EM-WMDL	INTERNAL EMERGENCY BACK UP BATTERY	
OPT-SEN-3MRLV-5	PROGRAMMABLE MICROWAVE BI-LEVEL	
OPT-SEN-NLS-WMDL	WG NETWORK SENSOR	
OPT-SEN-KEILTON-WMDL	KEILTON NETWORK SENSOR	
OPT-TRS-T20	TAMPER RESISTANT SCREW	
OPT-CLR-70(BK/GR/SR/WH)	POWDER COATING	
OPT-CLR-MC (390 SET UP FEE PER PROJECT)	POWDER COATING	
OPT-PC-B	BUTTON	
WEC-8RC	REMOTE CONTROL	