

LRS SERIES Outdoor Lighting



LRS-ML-SG-MCT-P-BK
8" MINI SQUARE LANTERN W/ PHOTOCELL
MCT SEEDED GLASS WALL SCNCES

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ Type: _____



7 5/8" (W) x 11 1/8" (H) x 6 1/2" (D)
Back Plate Dimensions: 7" x 4.5"

LED Seaside Outdoor Wall Lantern with Wire guard with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

Features

- Aluminum Housing and Steel Back Plate
- Seeded Glass Lens
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 65 LPW

Mechanical:

- Aluminum Housing and Steel Back Plate
- Seeded Glass Lens
- Pre-installed Photocell on top. Silicon Cover Incl.
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Total Lumens: 650LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated life: 70,000 Hrs

Applications:

- LED Seaside Outdoor Wall Lantern with Wire guard with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-0527/2025

Photometrics: LRS-ML-SG-MCT-P-BK

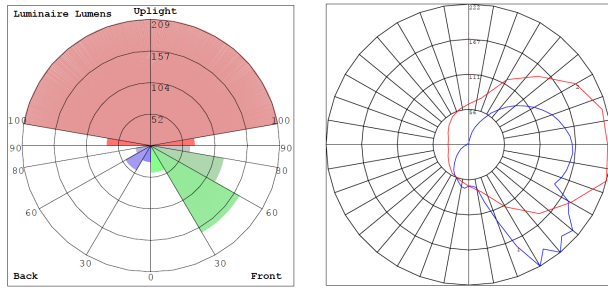

BUD Rating: B0-U3-G1

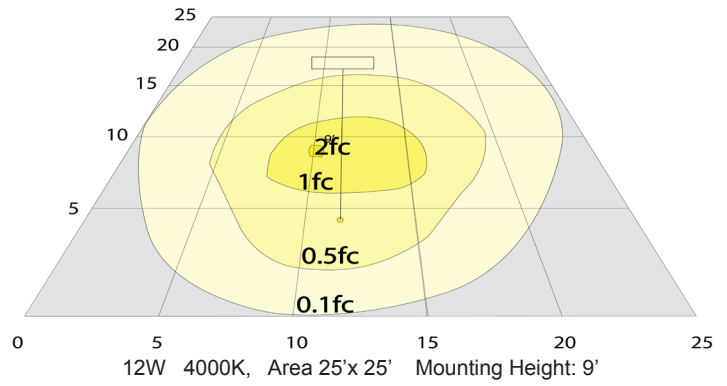

Performance Table: LRS-ML-MCT-P-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-ML-SG-MCT-P-BK	12W	120V	650LM	3000K 4000K 5000K	B0-U3-G1	54

Sample Ordering

Model	Lens	Color Temp.	Housing	
LRS	ML	SG	MCT	BK

