PML SERIES Outdoor Lighting

PML-V-MCT-ORB

SELECTABLE CCT PIER-MOUNT LIGHTS

Multi Color Temperature (Selectable)

WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

Customer Name:

Project Name:

Note: | Type:

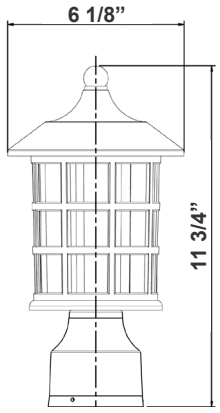

6 1/8”(W) x 11 3/4”(H)

Features

- Aluminum Housing and Steel Plate
- Powder-Coated Finish
- 7-Year Warranty
- Multi CCT Switch is Inside Fixture

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 125 LPW

Mechanical:

- Oil-Rubbed Bronze Finish
- DC Button Photocell on top of the Mounting Plate
- With Inside Frosted Lens & External Clear Lens
- Operating Temperature: -4ºF to 104ºF
- 7-Year Warranty
- IP42, Suitable For Wet Location

Lighting:


- Multi CCT Switch is Inside Fixture
- Total Lumens: 1500LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:


- LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

Photometrics: PML-V-MCT-ORB

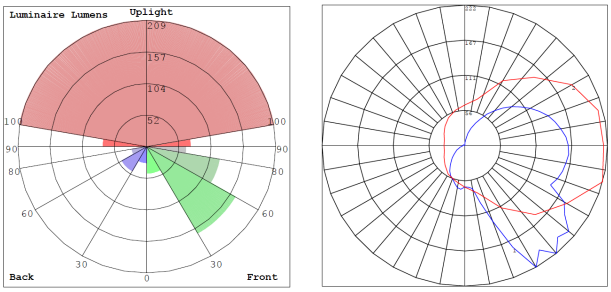

BUD Rating: B0-U3-G1

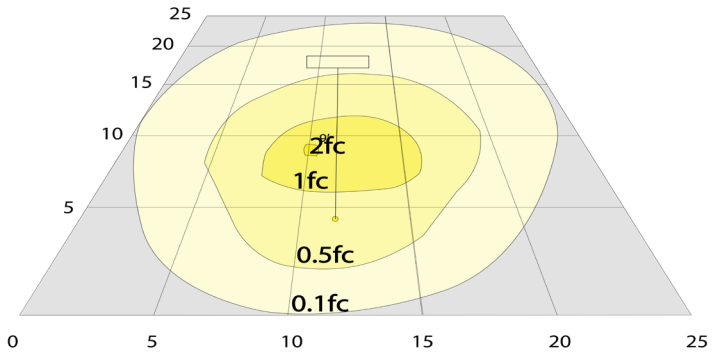

12W 4000K, Area 25'x 25' Mounting Height: 9'

Other Views:



Side View



Front View



Top View

Performance Table: PML-V-MCT-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
PML-V-MCT-ORB	12W	120V	1500LM	3000K 4000K 5000K	B0-U3-G1	125

Sample Ordering

Model		Style		Color Temp.		Housing
PML	-	V	-	MCT	-	ORB