

JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_




Junction box 1" thick included with fixture

RSL12-30K  
RSL12-40K  
RSL12-50K

## DIMENSIONS:

1/4" (Thick)

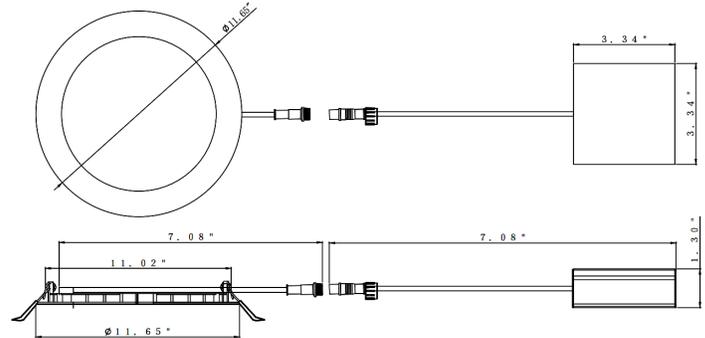

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL12-30K	28W	120VAC	2100LM	3000K
RSL12-40K	28W	120VAC	2100LM	4000K
RSL12-50K	28W	120VAC	2100LM	5000K

## LED ULTRA SLIM RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 28W
- Power factor: >0.90
- Efficacy: 70LM/W

### HOUSING SPECIFICATIONS:

- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

### CERTIFICATIONS: ETL,ES



### OPTIONAL ACCESSORIES:



RSL-EXT-10FT

MODEL	DESCRIPTION
RSL-EXT-10FT	10 Ft. Extension Cable For use with all Slim Light

### LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 2100LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100° - 110°

### WARRANTY: 5 years



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

RSL12-30K  
RSL12-40K  
RSL12-50K

**LED ULTRA SLIM RECESSED LIGHTS**

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL12-30K	28W	120VAC	2100LM	3000K
RSL12-40K	28W	120VAC	2100LM	4000K
RSL12-50K	28W	120VAC	2100LM	5000K

**BRAND OF DIMMERS:**

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Pass & Seymour	HCL453PTCCCV6
8	Pass & Seymour	LSLV603PWV

