

SOLR SERIES Outdoor Lighting

SOLR-WL1-30K-SEN-BK
SOLAR ROADWAY STUD LIGHT




WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

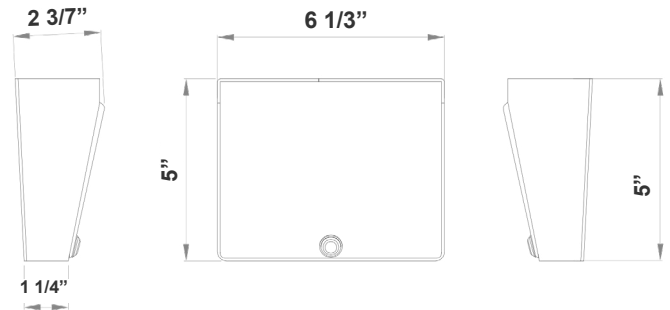

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

5"(H) X 6 1/3"(W) X 2 3/8"(D)

Features

- 7-Year Warranty
- Robust Aluminum Alloy + Polycarbonate Cover
- Lifespan: 70000 Hrs.
- Lens: TYPE III Optic Lens

Technical Specifications

Electrical:

- LED Wattage: 5W
- Power Factor: 0.95
- Efficacy: 100 LM/W

Mechanical:

- Operating Temperature: 14°F to 122°F
- IP Rating: IP65

Battery:


- Operation on Full Charge: 6-8 hrs. Depending on the Sunlight Quality, See The Map On Page 3
- Battery Type: Lithium-ion 5200mAh
- Battery Life: More than 2000 Cycles (2000/365 days = 5.47 years) With Overcharge And Over-Discharge Protection

Lighting:

- Lens: TYPE III Optic Lens
- LED: Lumileds Luxeon 5050
- Total Lumens: 500LM
- Color Temperature: 3000K
- Color Rendering Index: >70
- Lifespan: 70000 Hrs.

Applications:



- Ideal for Ideal for doorway, pathway and alleys

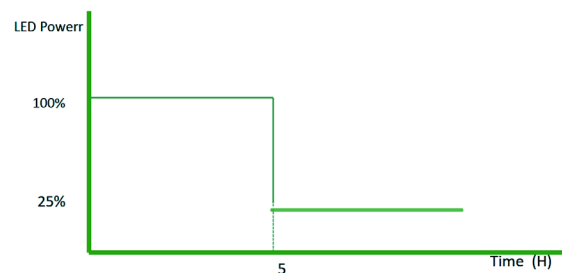


Working mode:
Dusk to Dawn
Full Brightness for First 5Hrs.
Dim to 25% for 7Hrs.



Photometrics: SOLR-WL1-30K-SEN-BK



BUG Rating: B1-U2-G0

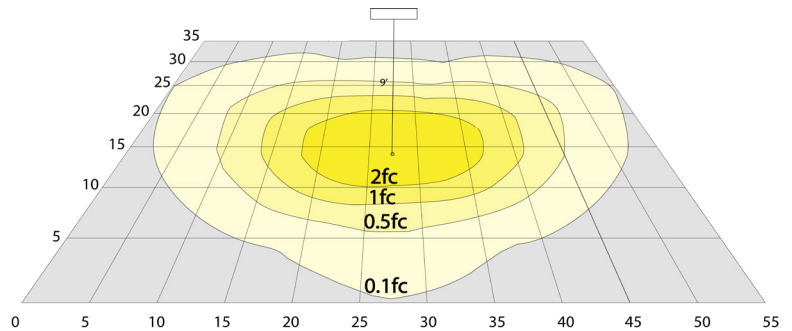

Area 35'x 55' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: SOLR-WL1-30K-SEN-BK

MODEL NO.	LED WATTS	Lumens	Color Temp.	BUG Rating	LPW
SOLR-WL1-30K-SEN-BK	5W	500LM	3000K	B1-U2-G0	100

Sample Ordering

Model	Style	Color Temp.	Sensor	Housing
SOLR	WL1	30K	SEN	BK



Average Daily Solar Radiation Per Month:

Increasing the tilt 15° in the winter or decreasing 15° in the summer gives the maximum sunlight for recharging the battery.

