



Junction box 1" thick included with fixture

RSL6-BF-MCT5

6" LED 5CCT SLIM REGRESSED BAFFLE LIGHTS, 120V

Ideal for New as well as old residential and commercial constructions.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120V
- Wattage: 12W
- Power factor: >0.90
- Efficacy: 79LM/W


HOUSING SPECIFICATIONS:

- Die-cast Aluminum with white powder coat finish
- Junction box included with fixture
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

CERTIFICATIONS: UL,ES



DIMENSIONS:

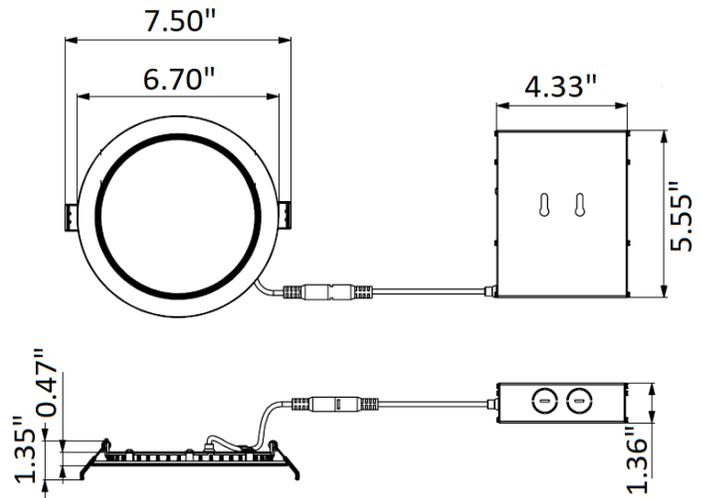

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL6-BF-MCT5	12W	120V	900LM	MCT: 27K/30K/35K/40K/50K

OPTIONAL ACCESSORIES:



MODEL	DESCRIPTION
RSL-BF-EXT-6FT-MCT5	RSL-BF 6FT Extension Cord
RSL-BF-EXT-10FT-MCT5	RSL-BF 10FT Extension Cord
RSL-BF-EXT-20FT-MCT5	RSL-BF 20FT Extension Cord

LIGHTING SPECIFICATIONS:

- Dimming: TRIAC dimmable
- Optics: White translucent acrylic
- Total lumens: 900LM
- Color temperature: MCT(2700K/3000K/3500K/4000K/5000K)
- Color rendering index: >90

WARRANTY: 5 years

