

DLSE SERIES Residential Lighting

DLSE6-MCT5-BR

MCT Multi Color Temperature (Selectable)



Selection:



Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

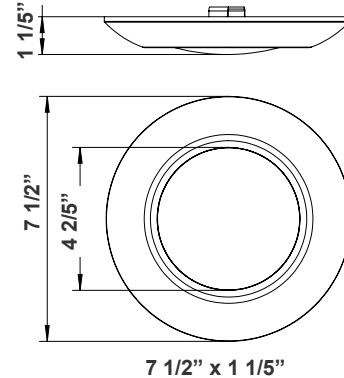

Features

- Spun Steel, Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- MCT: The Switch is On The LED Board Under The Lens
- White Translucent Acrylic Lens
- JA8-E-2016 & Title 24 Compliant (approved approved by the state of California and registered with the California Energy Commissions (CEC))

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 67 LPW

Mechanical:

- Bronze Finish
- Spun Steel, Powder-Coated
- Suitable for use in Clothes Closet Spaces to comply with NEC Regulations 410.16(a)(3) and 410.16(c)(5)
- Fits on 4" Octagonal (4O) or 3" Octagonal (3O) Electrical Boxes
- Maximum Ambient Temperature: 104°F
- Suitable for Damp Location
- 5-Year Warranty

Lighting:

- Lens: White Translucent Acrylic
- MCT: The Switch is On The LED Board Under The Lens
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Damp Location Performance
- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 1000LM
- Color Temperatures: 2700/3000/3500/4000/5000K
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

Applications:

- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

Other Models:

- 15W | 1000LM | DLSE6-MCT5
- 15W | 1000LM | DLSE6-MCT5-BN





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z7-26-27

Photometrics: DLSE6-MCT5-BR



BUG Rating: B1-U2-G1

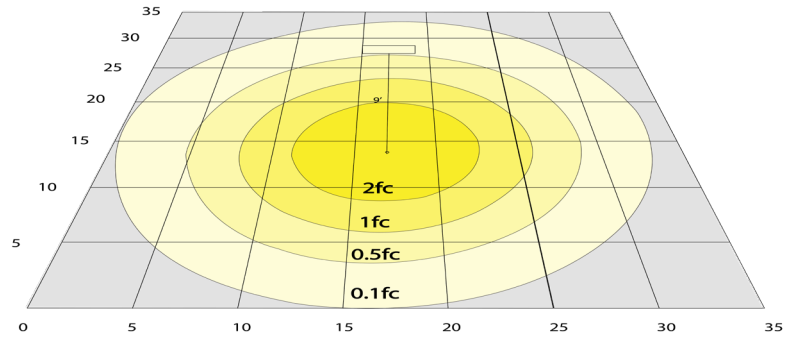

15W 5000K, Area 35'x 35' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: DLSE6-MCT5-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLSE6-MCT-BR	15W	120V	1000LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	67

Sample Ordering

Model	Color Temp.	Housing
DLSE6	MCT5	BR

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-DLS6 = EMERGENCY OPTION - MOUNT IN EXTENDED BASE

FACTORY-INSTALLED OPTION:



OPT-EM-DLS6

