

SPEKTRUM+

TRULUX LIGHTING SYSTEMS
STANDARD GRADE HD
TAPE LIGHT


TASK LIGHTING

DOWNLIGHTING

LINEAR LIGHTING

ARCHITECTURAL LIGHTING


POWER SUPPLIES

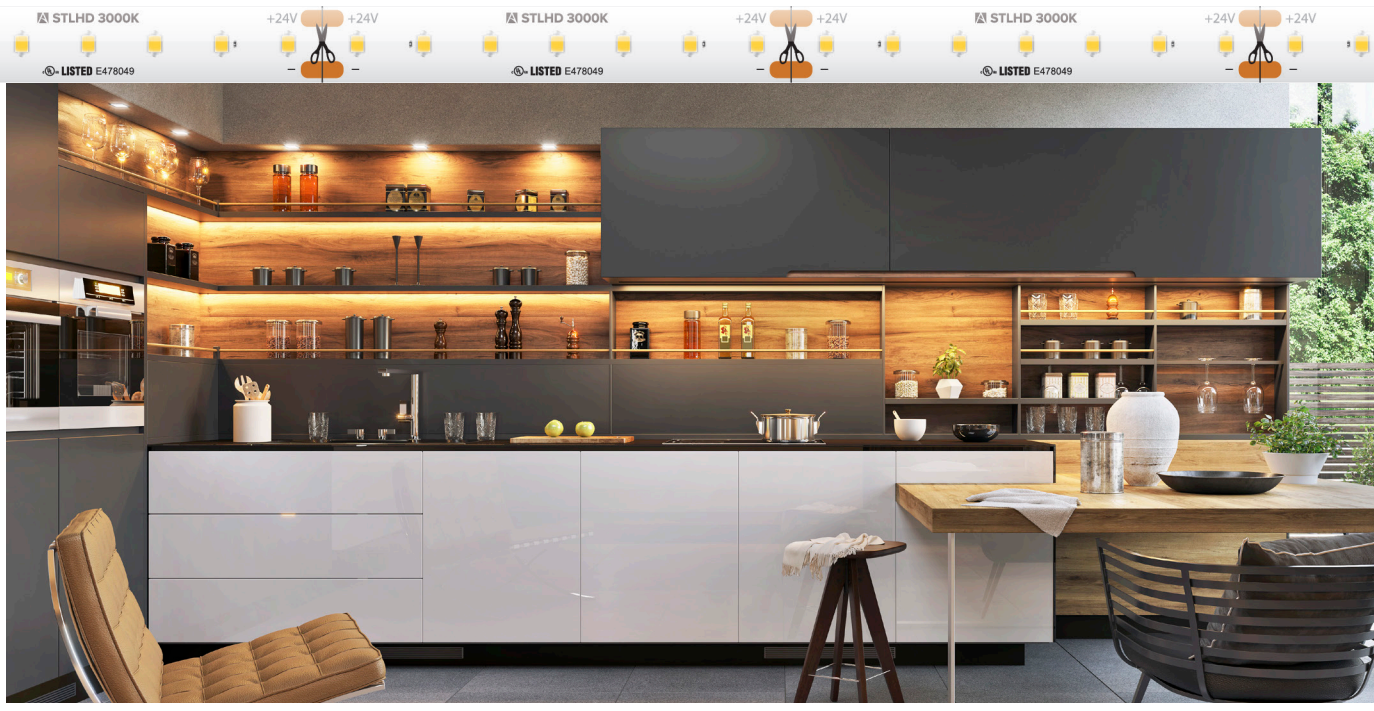

Features

- Excellent color rendering of 90+ CRI
- Color temperatures from 2700K to 5000K
- 200-235 lumens per foot performance
- Consumes only 2.19 watts per foot
- Cuttable every 2.46in (62.5mm)
- 32.8 foot max run
- Dimmable with most ELV dimmers
- Rated IP54 - Unjacketed
- 50,000 hours rated life

Available CCT



Control Options

- Primary Side Dimming
- Single Color Controls
- Spektrum+™ Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ Standard Grade HD

Standard Grade HD tape light is a powerful new addition to the award-winning Trulux™ lighting system. By utilizing a new LED, Standard Grade HD tape light is able to produce up to 235 lumens per foot while using just 2.19 watts per foot. With cutting increments every 2.46 inches, this tape light can be cut to fit your project perfectly.

Technical Information

Series	STLHD
Input Voltage	24V DC
CCT	2700K 3000K 3500K 4000K 5000K
CRI	90+
Wattage	Up to 2.19W per foot
Lumens	Up to 235Lm per foot
Max Run	32.8ft
Cuttable	Every 2.46in (62.5mm)
IP Rating	IP54 - Unjacketed
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

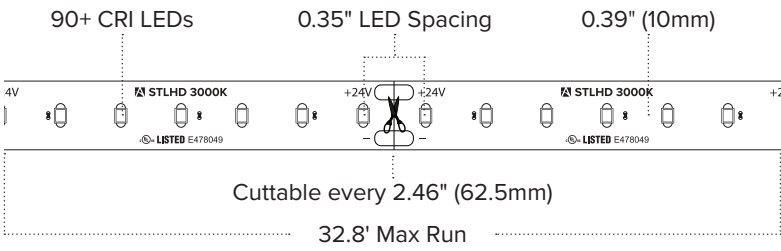



STLHD SERIES ORDERING INFORMATION

Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STLHD-UWW-16	24V DC	2700K	16.4ft	200Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-UWW-100	24V DC	2700K	100ft	200Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-UWW-CC	24V DC	2700K	Custom Cut	200Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WW-16	24V DC	3000K	16.4ft	210Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WW-100	24V DC	3000K	100ft	210Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WW-CC	24V DC	3000K	Custom Cut	210Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-NW-16	24V DC	3500K	16.4ft	220Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-NW-100	24V DC	3500K	100ft	220Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-NW-CC	24V DC	3500K	Custom Cut	220Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WH-16	24V DC	4000K	16.4ft	235Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WH-100	24V DC	4000K	100ft	235Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-WH-CC	24V DC	4000K	Custom Cut	235Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-CW-16	24V DC	5000K	16.4ft	230Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-CW-100	24V DC	5000K	100ft	230Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)
STLHD-CW-CC	24V DC	5000K	Custom Cut	230Lm/ft	2.19W/ft	IP54	90+	2.46" (62.5mm)


STLHD (IP54) 16.4ft Reels include: Attached 3' lead wires | (3) TL-BLKS | (3) TL-CONKITS | (3) TL-2PWR-HD
 STLHD (IP54) 100ft Reels include: Attached 3' lead wires | (5) TL-BLKS | (5) TL-CONKITS | (5) TL-2PWR-HD

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
LVSB-2PIN	2pin Low-Voltage Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light