

LED
TECHNOLOGY

50,000 Hours Life, 60 Watt, 120-277VAC 50/60Hz

Applications:



Pathway, Wall, Security, Walkways, and Perimeter Lighting.

Features:

- Adjustable CCT 3000K, 4000K, and 5000K
- Photocell Included with Quick Disconnect
- 120/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Certified Outdoor Wet Location
- Replaces 150W HID Unit
- Bronze, Powder Coat Finish
- Polycarbonate Lens with UV Stabilization



Luminous Intensity Distribution Curve

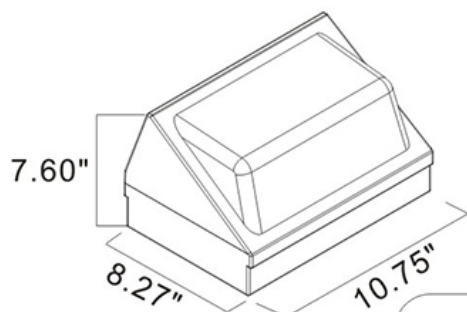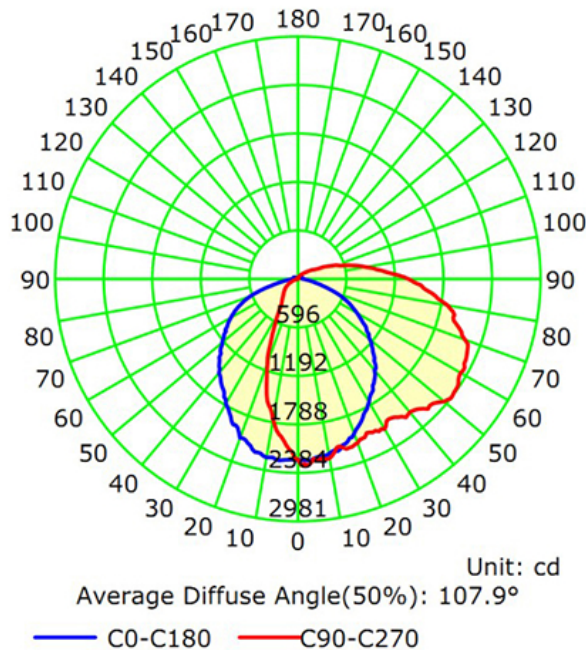

Specification:

Input Line Voltage:	120-277VAC
Input Power	60W
Input Line Frequency	50/60Hz
Luminaire Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	45°C/113°F
Adjustable CCT	3000K/4000K/5000K
CRI	≥80
Lumens	7200
Power Factor 120/277V	0.99/0.91
CBCP	2384
Dimmable	0-10V

Height	Avg./Nadir, E	Beam Angle: 104.4°	Diameter / Area
1.0m	665.41/ 2222.33lx		2.58m / 5.22sq.m
2.0m	166.35/ 555.58lx		5.15m / 20.87sq.m
3.0m	73.93/ 246.93lx		7.73m / 46.96sq.m
4.0m	41.59/ 138.90lx		10.31m / 83.48sq.m
5.0m	26.62/ 88.89lx		12.89m / 130.44sq.m
6.0m	18.48/ 61.73lx		15.46m / 187.83sq.m
7.0m	13.58/ 45.35lx		18.04m / 255.66sq.m
8.0m	10.40/ 34.72lx		20.62m / 333.93sq.m
9.0m	8.21/ 27.44lx		23.20m / 422.62sq.m
10.0m	6.65/ 22.22lx		25.77m / 521.76sq.m

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP60FHZ/CCT	60 Watt LED Wall Pack Bronze Body, Adjustable CCT	60W	7200

