

EL61030W; EL61040W EL61130W; EL61140W

5" or 6" LED Baffle Insert




PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

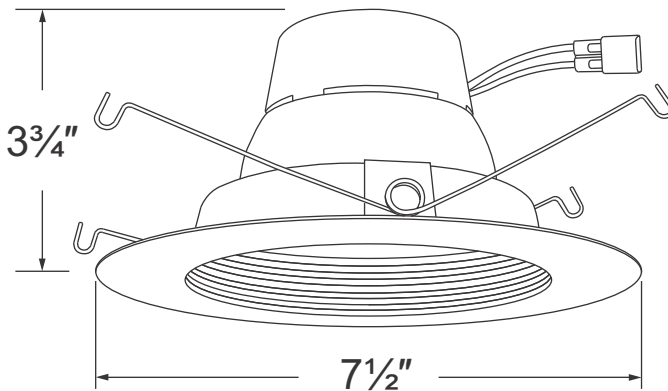

PRODUCT SPECIFICATIONS

- Suitable for use in fixtures installed in insulated ceilings.
- Suitable for installation in tall and shallow cans.
- Suitable for new construction and remodel housings.
- Suitable for installation into a 5" or 6" recessed fixtures with 2-wire connector.
- Suitable for installation into a 5" or 6" recessed fixtures with medium base socket, using PSA30 adaptor (included)
- Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant.
- Meets ENERGY STAR requirements.

Lamp: LED array chip CRI 90

EL61030W: 12W 3000°K, 875 lm, 90° beam angle

EL61040W: 12W 4000°K, 950 lm, 90° beam angle

EL61130W: 16W 3000°K, 1100 lm, 90° beam angle

EL61140W: 16W 4000°K, 1200 lm, 90° beam angle

LED Driver: 120V AC, dimmable

Life-span: 50,000 hours

Labels: U.L. listed for wet locations

Warranty: 5 years limited

CATALOG NUMBER

Example: EL61030W
EL61040W

Accessories:
PSA35 (GU24 Male Socket Adaptor)