


SnapTrim-Line: 3" Cylinder Downlight

Adjustable J-Box Model

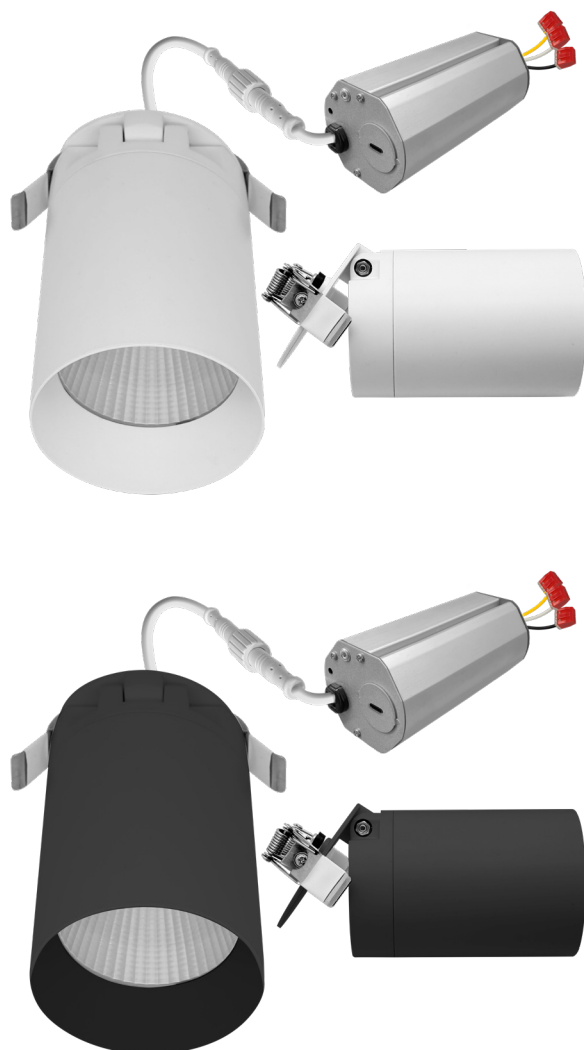

Detail Specifications:

- Finish: White or Black
- Trim: Round
- Wattage: 15
- Lumens: 1,000
- Wet Location Rated
- Beam Angle: 38° standard
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Angle adjustable up to 90°
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates traditional j-box

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions: 2-3/8"
- Optional new construction plate available
- This fixture does not work with a traditional j-box
- No can needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight

Item	Emergency
LED-DLJBX-3-CYL-ADJ-5CCT-WH White Finish	Blank
LED-DLJBX-3-CYL-ADJ-5CCT-BL Black Finish	None
	EMB
	Emergency Backup


Optional Accessories (Order Separately)

New Construction Plates	Extension Cables	Emergency Backup 1 (field install)
CUNV-NC-ICAT-7H Universal Plate with Hanging Bars	JBX-EXT-6'-2PIN 6' Extension	LED-EMB-15W-HV -0/10V-2P Up to 24W fixtures
CUNV-JBX-RI-XL Universal Rough In Plate Extra Long	JBX-EXT-10'-2PIN 10' Extension	
	JBX-EXT-12'-2PIN 12' Extension	


1. Field installable.
Lasts 90 minutes

Specs and model numbers are subject to change with or without notice.


FEATURES

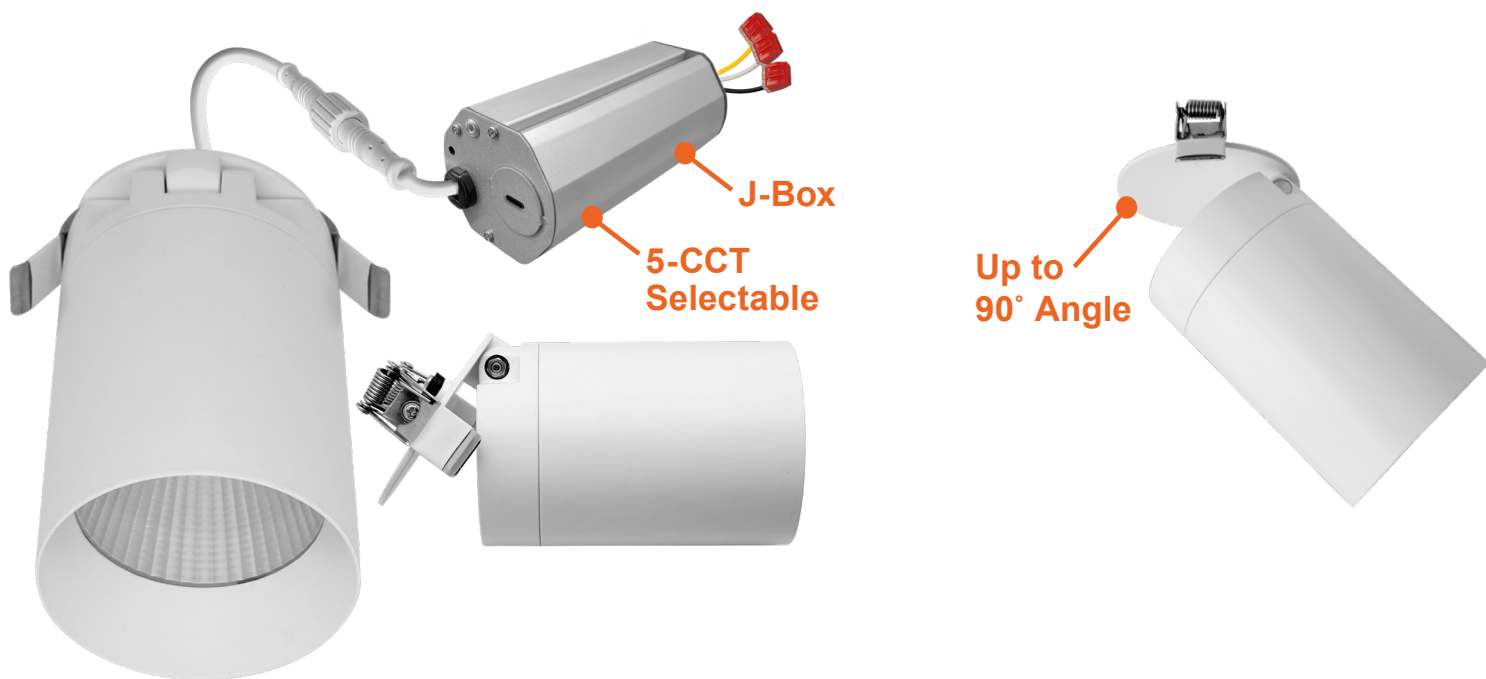


DIMENSIONS

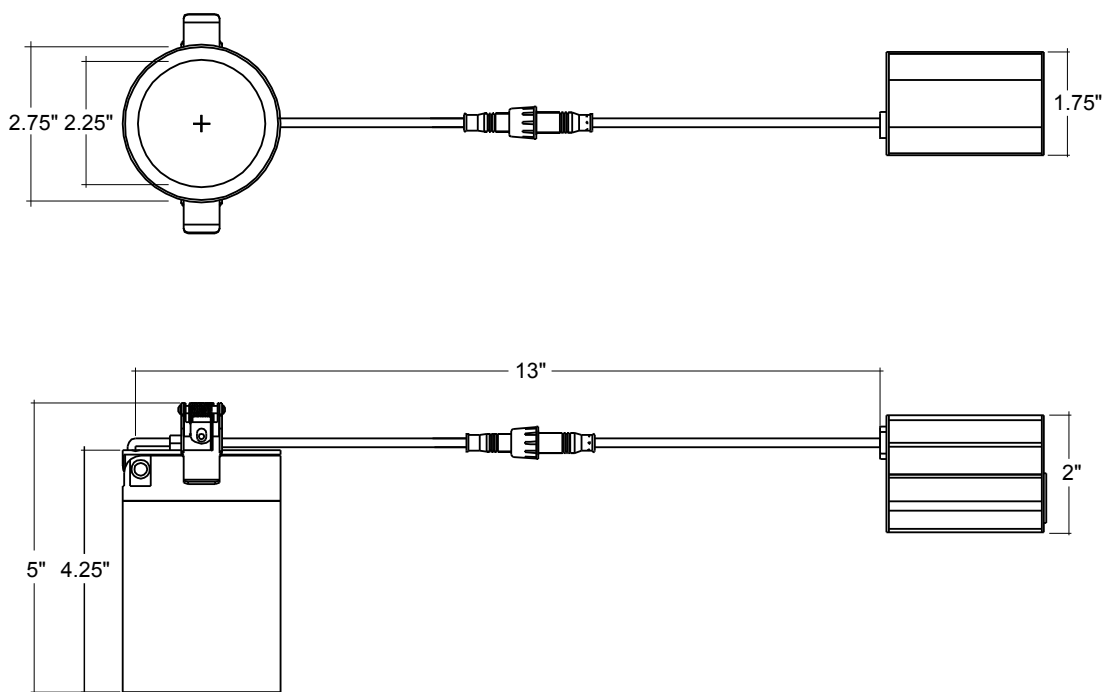

ACCESSORIES

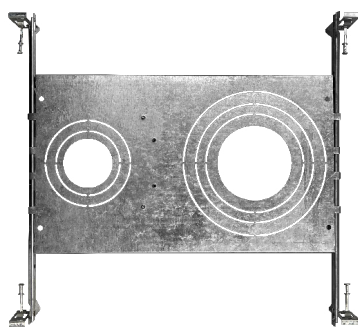

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

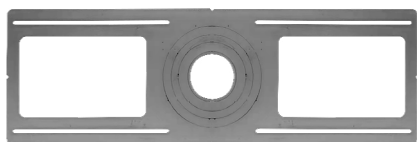

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



LED-EMB-15W-HV-0/10V-2P

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-3-CYL-ADJ-5CCT-WH	120V	15w	1000	50/40/35/30/27K	>90
LED-DLJBX-3-CYL-ADJ-5CCT-BL	120V	15w	1000	50/40/35/30/27K	>90

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 15W fixtures

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	6633	ADTP703TU	9540
DV-600PR	6674	H703PTW	DAL06P
DVCL-153P	6602		
MACL-153MH	IPL06		
MRF2-6CL			
D-600P			
NTELV-300P			
S-600P			
CT-600P			
CTCL-153P			
TG-600P			
TCCL-153P			