LF4MAX SERIES Outdoor Lighting

LF4MAX-XL-200-300W-MCTPB-TR-P

MAXIMUM-FEATURE ROUND-BACK FLOOD LIGHT WITH U BRACKET

Multi Color Temperature & Multi Power/Wattage (Selectable)



Round-back floodlight with U-bracket offering full control of beam angle, CCT, wattage, and photocell. Model MTP4 arriving this season.


WESTGATE THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note:

Type:

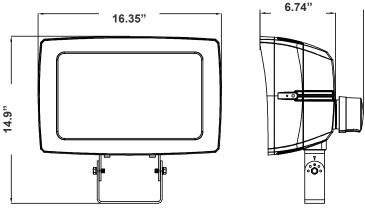

14.9"(W) x 16.35"(H) x 6.74"(D)

Features

- 270° Adju stable Yoke Mount
- 7-Year Warranty

 Multi-CCT & Multi-Power - The Switches are on the Bottom of the Fixture

Technical Specifications

Electrical:

Voltage: 120~277VAC/50~60 HzWattage: 200W/240W/300W

Power Factor: >0.9Efficacy: 140LPW

Mechanical:

- Housing: Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 270° Adjustable Yoke Mount
- Photocell Included (With Disconnect Switch)
- 6KV Lightning Surge Protection
- Cord Type: 6' SJTW 18/3 AWG cable
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Effective projected areas (EPA's) are:

Front = 0.38 square feet

Side = 0.30 square feet

Face = 1.05 square feet

- IP Rating: IP65
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi-CCT & Multi-Power The Switches are on the Bottom of the Fixture
- Total Lumens: 42000LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 70
- Adjustable Beam Angle: 135°x125°/120°x120°/
- 90°x90°
- 70,000 Hours Rated Life

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- · Replace existing HID flood lights/ wall packs
















Photometrics: LF4MAX-XL-200-300W-MCTPB-TR-P

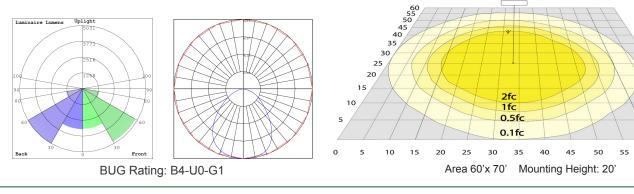

Other Views:



Performance Table: LF4MAX-XL-200-300W-MCTPB-TR-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LF4MAX-XL-200-300W-MCTPB-TR-P	200W 240W 300W	120~277V	28000LM 33600LM 42000LM	3000K 4000K 5000K	B4-U0-G1	140

Sample Ordering

Model	Size	Min.Wattage Max.Wattage Color Temp.Bracket Photocell				
LF4MAX -	XL	= 200 = 300W = MCTPB = TR = P				

